



NSK FCJSBE-32参数

外形尺寸	SD	12	mm	外径
尺寸	G	M12x1.5	mm	螺栓
	G1	13	mm	—
	B1	40	mm	—
	B2	25.0	mm	—
	B3	6	mm	—
	M2	3	mm	—
	M1	6	mm	—
	R	0.6	mm	(最小)
基本额定载荷	CR	7200	N	动载荷
极限载荷	PMAX	9250	N	极限载荷
滚轮极限载荷	LTL	8050	N	滚轮极限载荷
重量	MASS	96	g	重量
六角形孔的尺寸	X	6.0	mm	双边距离
偏心轴衬尺寸	B4	12.0	mm	—
	SD1	17	mm	—
	E	1.0	mm	—
挡肩尺寸	F	20.0	mm	(最小)
拧紧力矩	TT	1450	n. cm	(最大)
型号	型号	FCJSBE-32		—
外形尺寸	D	32	mm	外径
	C	14	mm	宽度

NSK FCJSBE-32图片

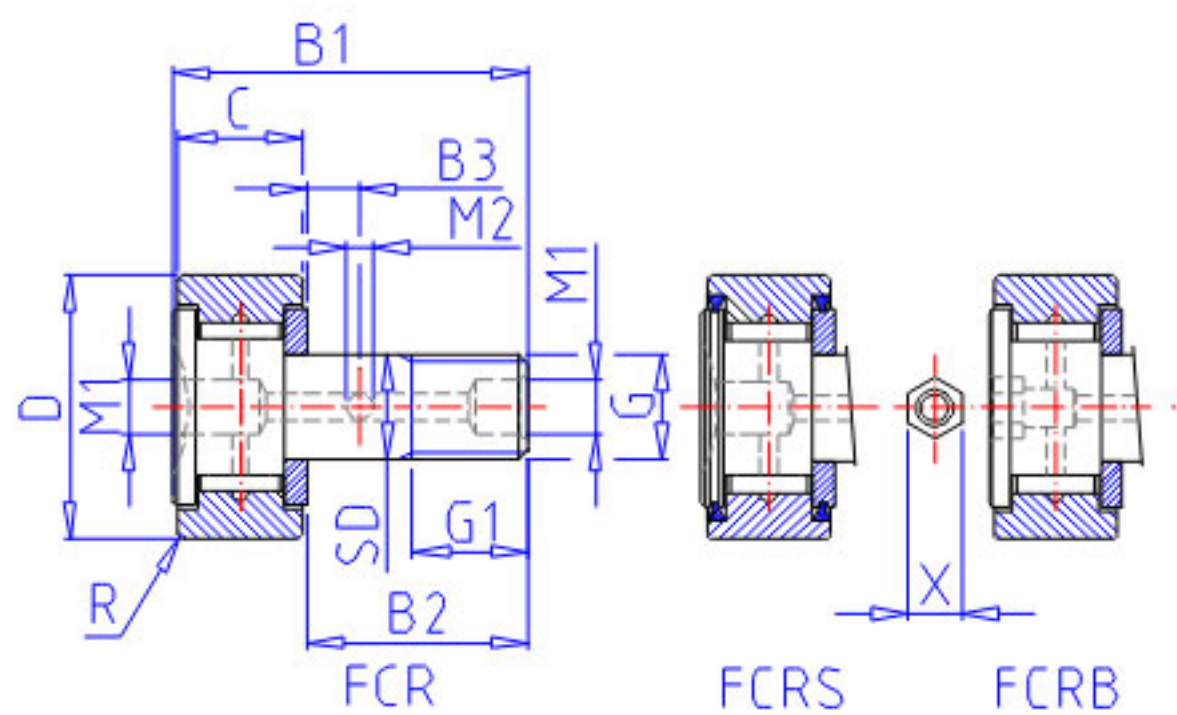

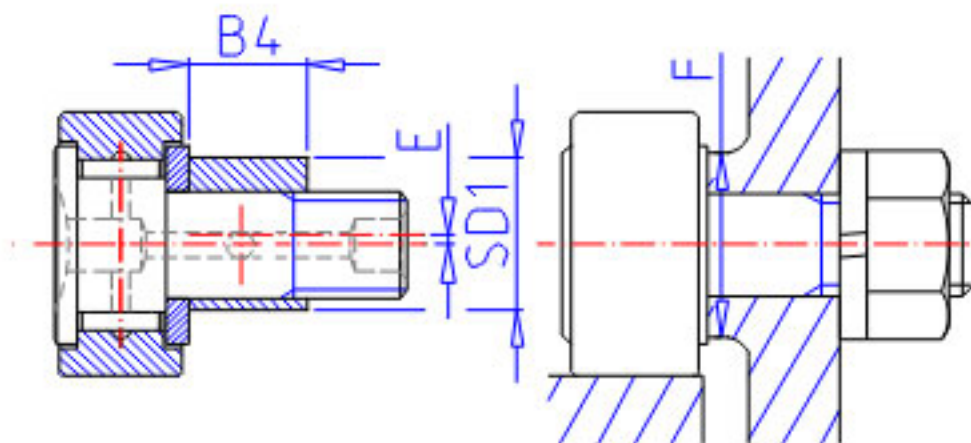

FCRE

参考资料:<http://www.sozhou.com/p/023239ad.html>

