
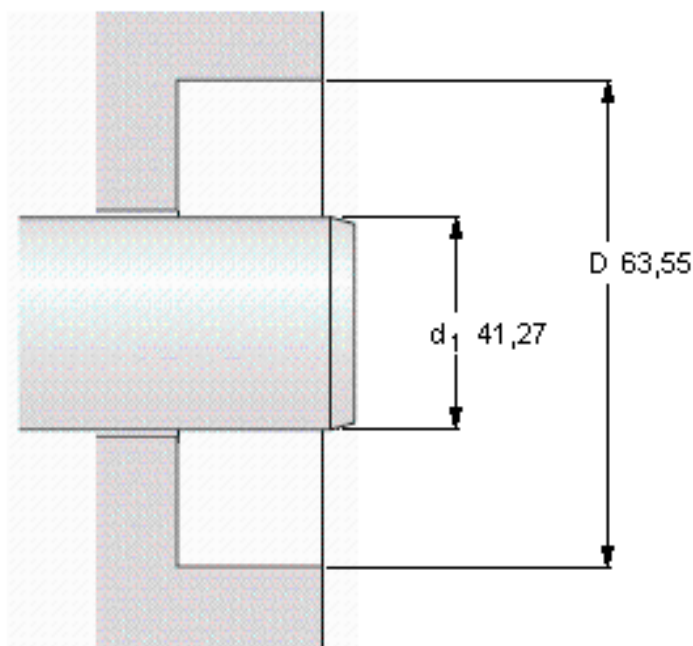


SKF 16243参数

主要尺寸	d_1	41.27	mm	—
	d	63.55	mm	—
	b	7.95	mm	—
设计	设计	CRWA1	—	—
密封唇材料	密封唇材料	V	—	—
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.07	—	—
型号	型号	16243	—	—
美国图纸编号	美国图纸编号	16243	—	—

SKF 16243图片

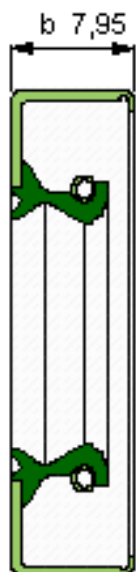

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428



Rotational speed [r/min]

8329
at circumferential speed [m/s / ft/s]
18 / 59.04

Pressure differential [MPa / psi]

0.07 / 10.15

See also "Permissible speeds" and "Chemical and thermal resistance"

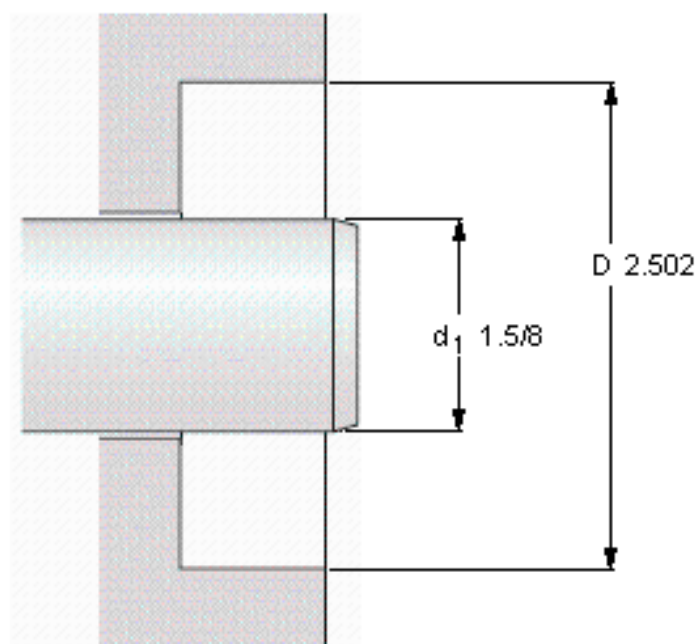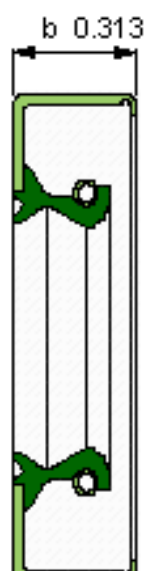

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428

Rotational speed [r/min]

8329

at circumferential speed [m/s / ft/s]

18 / 59,04

Pressure differential [MPa / psi]

0,07 / 10,15

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/0318f061.html>