


## SKF 2500247参数

主要尺寸	d <sub>1</sub>	635	mm	-
	d <sub>1</sub>	673.1	mm	-
	b	19.05	mm	-
设计	设计	HS7	-	-
密封唇材料	密封唇材料	D	-	-
Pressure differential [MPa/psi]	Pressure differential [MPa / - psi]	-	-	-
型号	型号	2500247	-	-
美国图纸编号	美国图纸编号	2500247	-	-

## SKF 2500247图片

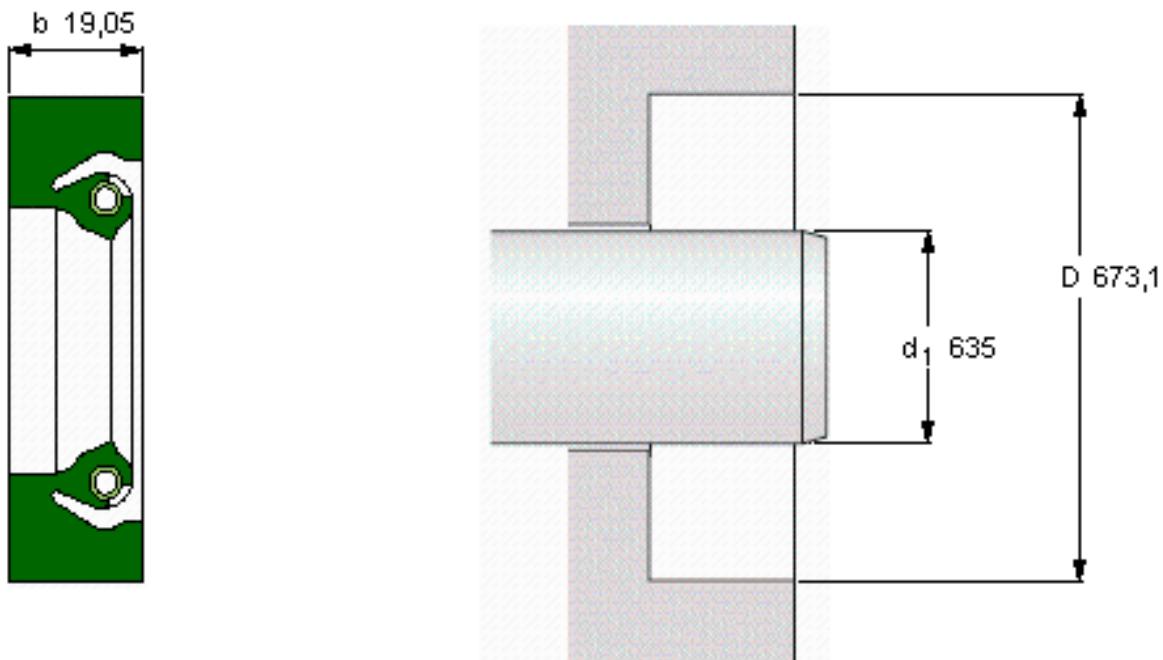

### Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	100 / 212
short periods	
120 / 248	



### Rotational speed [r/min]

-	at circumferential speed [m/s / ft/s]
	7,5 / 24,6

### Pressure differential [MPa / psi]

0 / 0

See also "Permissible speeds" and "Chemical and thermal resistance"

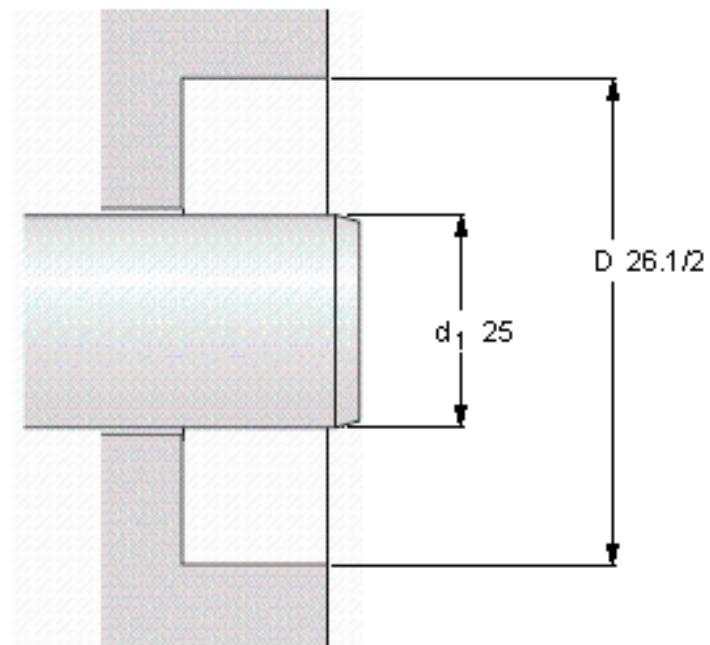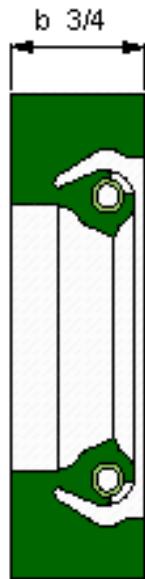

**Permissible operating temperature [°C / °F]**

最小	最大
-40 / -40	100 / 212
	short periods
120 / 248	

**Rotational speed [r/min]**

-	at circumferential speed [m/s / ft/s]
	7,5 / 24,6

**Pressure differential [MPa / psi]**

0 / 0

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/0ae591e1.html>