


## NSK 54305U参数

型号	型号	54305U		-
外形尺寸	SD2	20	mm	内径
	SD	25	mm	外径
	D	52	mm	宽度
	T1	34	mm	-
	T5	37.6	mm	-
	T7	42	mm	-
	SR	1.0	mm	(最小)
	SR1	0.3	mm	(最小)
基本额定载荷	CAN	36000	N	动载荷
	COAN	61500	N	静载荷
	CA	3650	kgf	动载荷
	COA	6250	kgf	静载荷
极限转速	GRE	3000	1/min	脂润滑
	OIL	4500	1/min	油润滑
尺寸	SD3	52.0	mm	-
	D1	27	mm	-
	D2	38	mm	-
	D3	55	mm	-
	T2	21.0	mm	-
	T6	22.8	mm	-
	T8	25.0	mm	-
	B	8	mm	-
	SB	6.0	mm	-
	A1	18.0	mm	-
	R	45	mm	-
	安装尺寸	DA	38	mm
SRA		1.0	mm	(最大)
SRB		0.3	mm	(最大)
重量	MASS	434	g	重量

## NSK 54305U图片

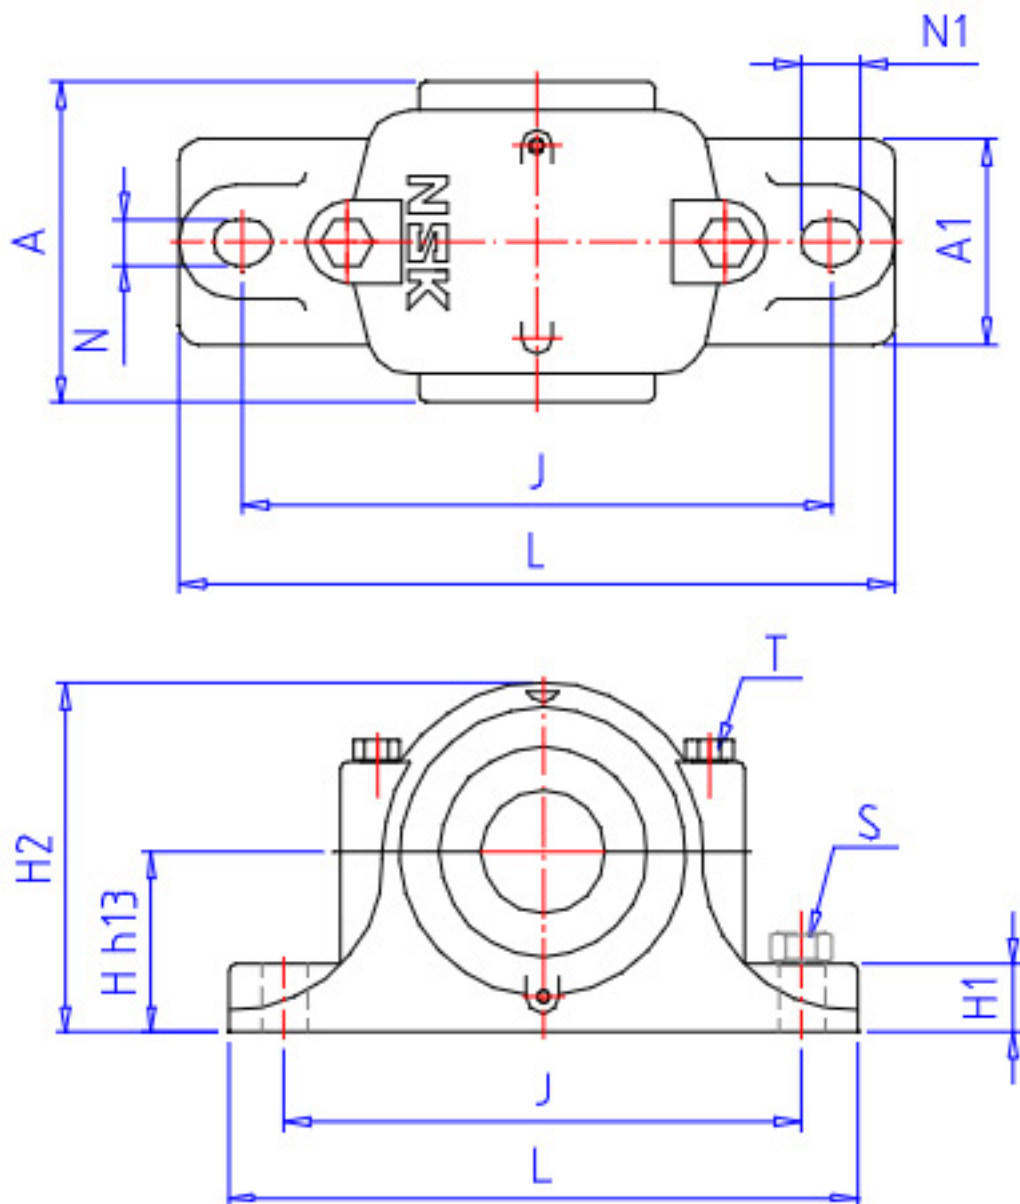

参考资料:<http://www.sozhou.com/p/134c30fb.html>

