


## SKF BC2B 319961参数


|        |       |             |       |     |
|--------|-------|-------------|-------|-----|
| 主要尺寸   | d     | 370         | mm    | —   |
|        | D     | 520         | mm    | —   |
|        | B     | 220         | mm    | —   |
|        | C     | 193         | mm    | —   |
| 基本额定载荷 | C     | 2750000     | N     | 动载荷 |
|        | $C_0$ | 6700000     | N     | 静载荷 |
| 疲劳载荷极限 | $P_u$ | 570000      | N     | —   |
| 额定转速   | 参考转速  | 850         | r/min | —   |
|        | 极限转速  | 1300        | r/min | —   |
| 重量     | 重量    | 130000      | g     | —   |
| 型号     | 型号    | BC2B 319961 | —     | —   |

## SKF BC2B 319961图片

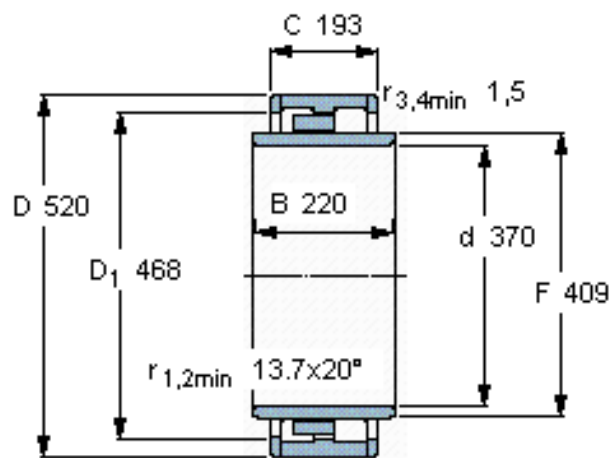

### 设计


NNUB.1/W33M

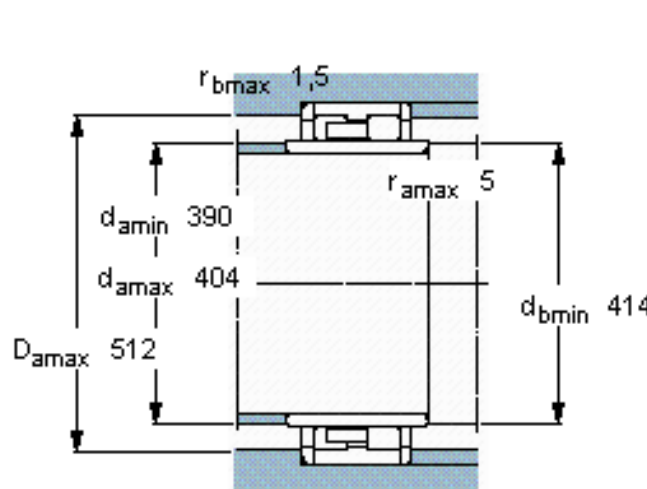

### 计算系数



$k_r$  0,34

参考资料:<http://www.sozhou.com/p/1bb46231.html>

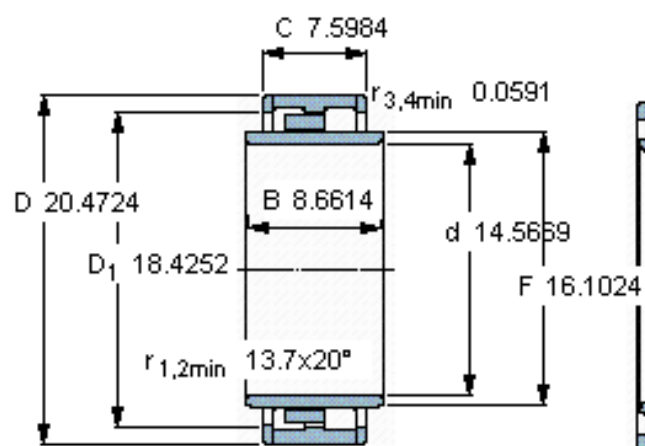

设计

NNUB.1/V33/M

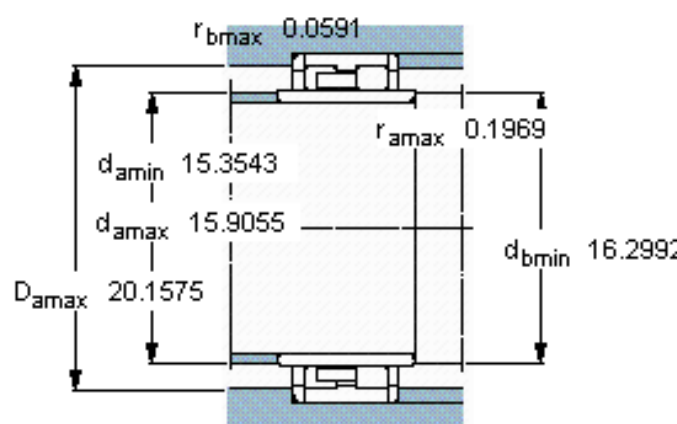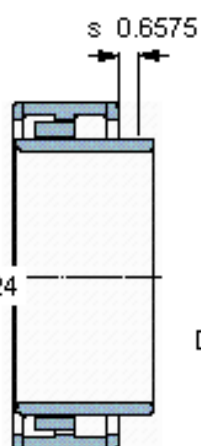

计算系数

$k_r$  0,34