
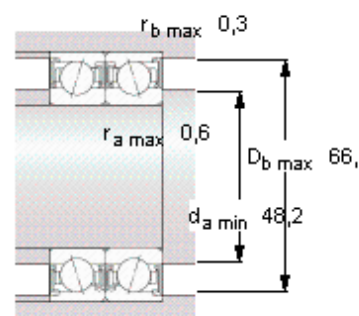
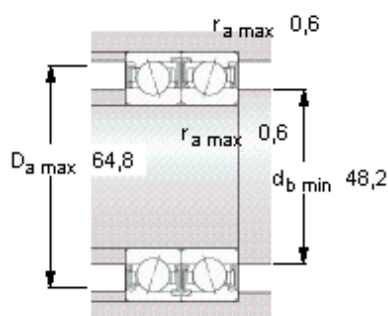


SKF S71909 CD/HCP4A参数

主要尺寸	d	45	mm	—
	D	68	mm	—
	B	12	mm	—
基本额定载荷	C	13000	N	动载荷
	C_0	9500	N	静载荷
疲劳载荷极限	P_u	400	N	—
可达转速	Grease	24000	r/min	—
	Oil-air	—	r/min	—
重量	重量	120	g	—
型号	型号	S71909 CD/HCP4A	—	—

SKF S71909 CD/HCP4A图片

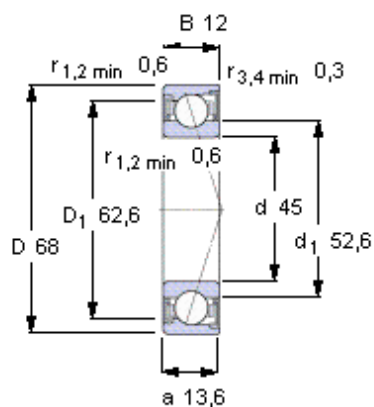

Ball diameter 6,35

Number of balls 23

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
50	100	200	400

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
44	59	81	115

Reference grease quantity [cm³]

G_{ref} —

计算系数

for equivalent bearing load

f_0 10,5

for preload in mounted bearing sets

f 1,11

f_1 1

f_{2A} 1



f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04

参考资料: <http://www.sozhou.com/p/1d54cf7d.html>

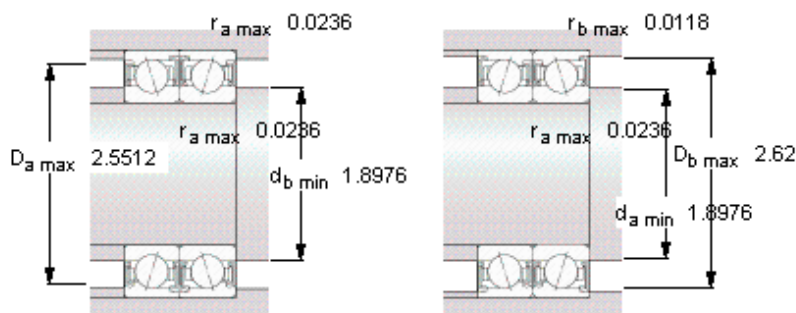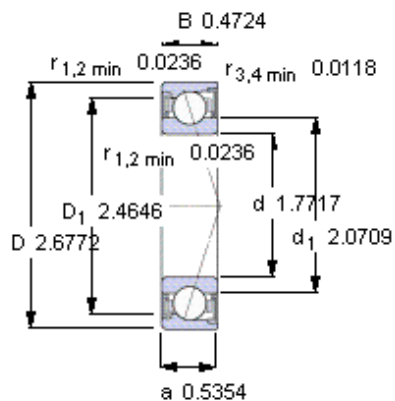

Ball diameter 6,35

Number of balls 23

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
50	100	200	400

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
44	59	81	115

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 10,5

for preload in mounted bearing sets

f 1,11

f_1 1

f_{2A} 1

f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04