
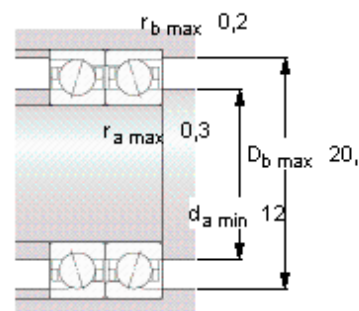
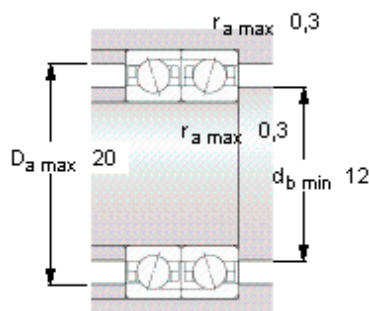



SKF 71900 CD/P4A参数

主要尺寸	d	10	mm	—
	D	22	mm	—
	B	6	mm	—
基本额定载荷	C	2510	N	动载荷
	C_0	1100	N	静载荷
疲劳载荷极限	P_u	48	N	—
可达转速	Grease	70000	r/min	—
	Oil-air	110000	r/min	—
重量	重量	9	g	—
型号	型号	71900 CD/P4A	—	—

SKF 71900 CD/P4A图片

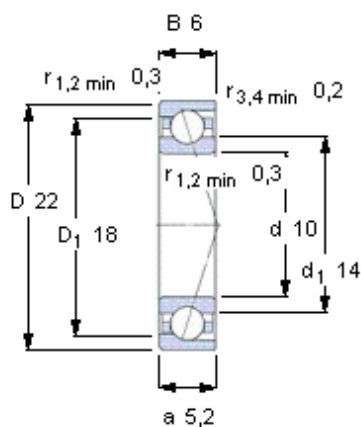

Ball diameter 3,175

Number of balls 12

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
10	20	40	80

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
12	16	22	32

Reference grease quantity [cm³]

G_{ref} 0,12

计算系数

for equivalent bearing load

f_0 9,5

for preload in mounted bearing sets

f 1,03

f_1 1





f_{2A} 1

f_{2B} 1,04

f_{2C} 1,09

f_{2D} 1,15

f_{HC} 1

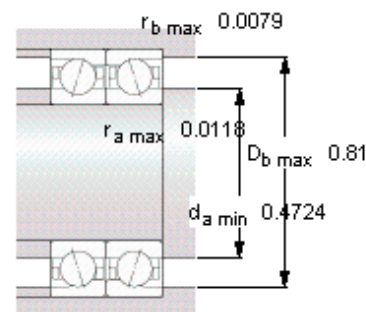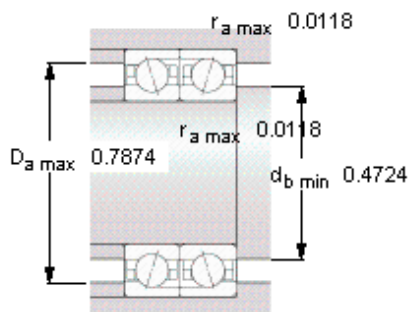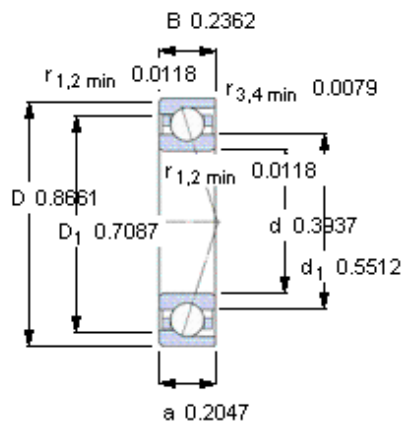

Ball diameter 3,175

Number of balls 12

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
10	20	40	80

Static axial stiffness [N/ μm]

(guideline value)

预载荷等级

A	B	C	D
12	16	22	32

Reference grease quantity [cm³]

G_{ref} 0,12

计算系数

for equivalent bearing load

f_0 9,5

for preload in mounted bearing sets

f 1,03

f_1 1

f_{2A} 1

f_{2B} 1,04

f_{2C} 1,09

f_{2D} 1,15

f_{HC} 1