

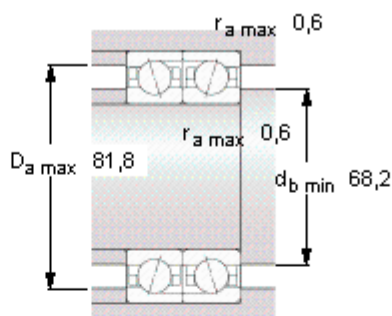



SKF 71813 CD/P4参数

主要尺寸	d	65	mm	—
	D	85	mm	—
	B	10	mm	—
基本额定载荷	C	13500	N	动载荷
	C_0	14600	N	静载荷
疲劳载荷极限	P_u	630	N	—
可达转速	Grease	15000	r/min	—
	Oil-air	22000	r/min	—
重量	重量	130	g	—
型号	型号	71813 CD/P4	—	—

SKF 71813 CD/P4图片

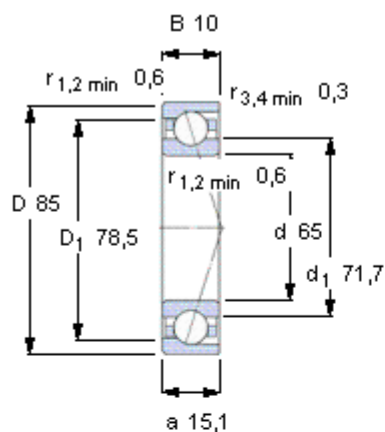

Ball diameter 5,556

Number of balls 29

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
53	160	320	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
61	105	155	-

Reference grease quantity [cm³]

G_{ref} 1,3

计算系数

for equivalent bearing load

f_0 17,1

for preload in mounted bearing sets

f 1,28

f_1 1

f_{2A} 1





f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1

参考资料: <http://www.sozhou.com/p/32455b3d.html>

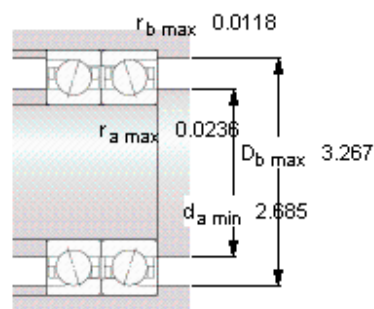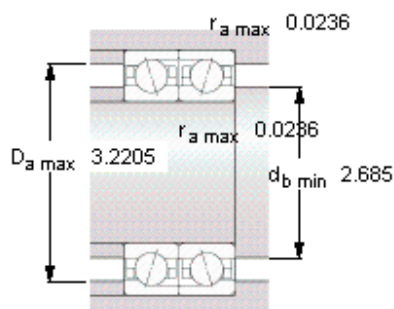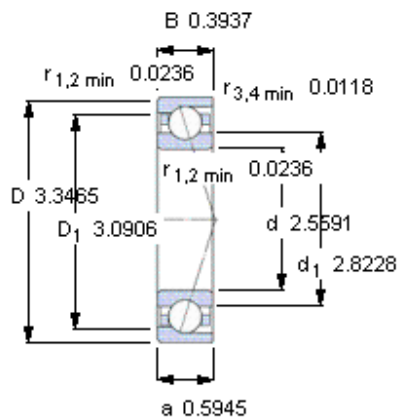

Ball diameter 5,556
Number of balls 29

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
53	160	320	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
61	105	155	-

Reference grease quantity [cm³]

G_{ref} 1,3

计算系数

for equivalent bearing load

f_0 17,1

for preload in mounted bearing sets

f 1,28

f_1 1

f_{2A} 1

f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1