




## SKF BC2B 320299参数

|        |       |             |       |     |
|--------|-------|-------------|-------|-----|
| 主要尺寸   | d     | 360         | mm    | —   |
|        | D     | 510         | mm    | —   |
|        | B     | 190         | mm    | —   |
|        | C     | 190         | mm    | —   |
| 基本额定载荷 | C     | 2600000     | N     | 动载荷 |
|        | $C_0$ | 6100000     | N     | 静载荷 |
| 疲劳载荷极限 | $P_u$ | 550000      | N     | —   |
| 额定转速   | 参考转速  | 900         | r/min | —   |
|        | 极限转速  | 1300        | r/min | —   |
| 重量     | 重量    | 120000      | g     | —   |
| 型号     | 型号    | BC2B 320299 | —     | —   |

## SKF BC2B 320299图片

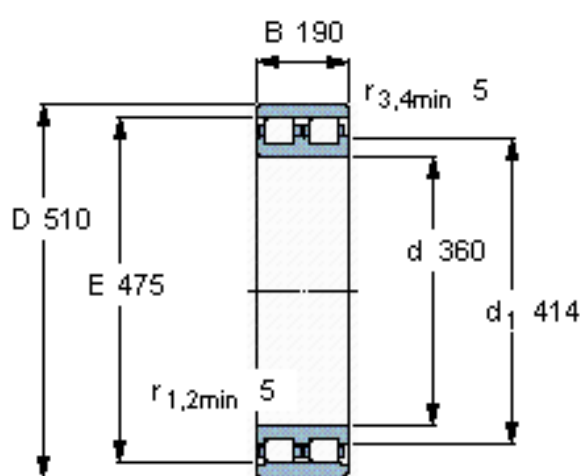


**设计**  
NN.1/W33

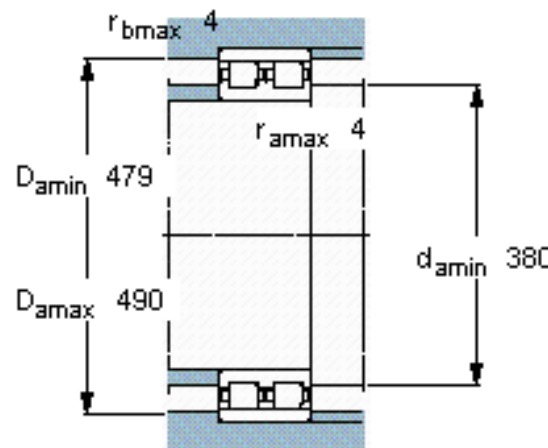
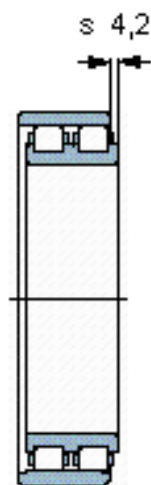


**计算系数**  
 $k_r$  0,32

参考资料:<http://www.sozhou.com/p/346cc9d9.html>

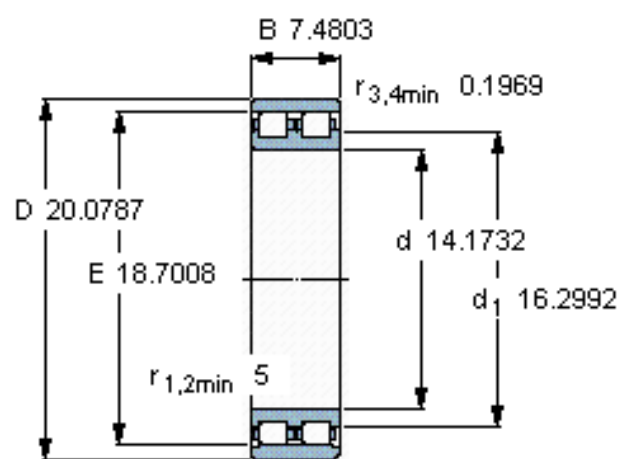

设计  
NN.1/W33

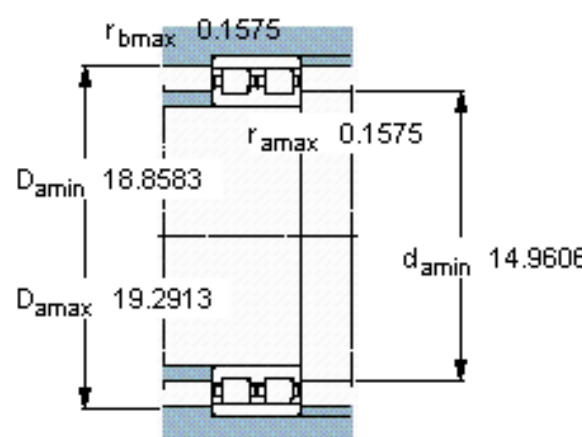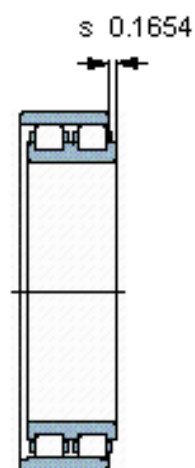

计算系数  
 $k_r$  0,32