
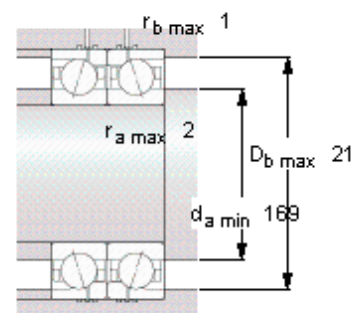
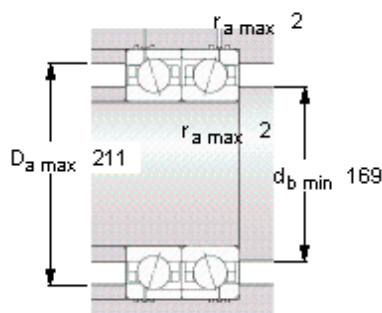



SKF 71932 CD/HCP4AH1参数

主要尺寸	d	160	mm	—
	D	220	mm	—
	B	28	mm	—
基本额定载荷	C	130000	N	动载荷
	C_0	160000	N	静载荷
疲劳载荷极限	P_u	5000	N	—
可达转速	Grease	7500	r/min	—
	Oil-air	11000	r/min	—
重量	重量	2250	g	—
型号	型号	71932 CD/HCP4AH1	—	—

SKF 71932 CD/HCP4AH1图片

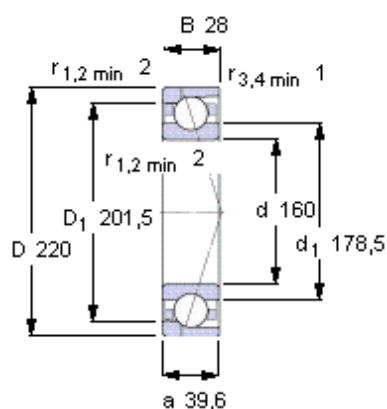

Ball diameter 19,05

Number of balls 28

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
490	980	1960	3920

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
184	252	357	523

Reference grease quantity [cm³]

G_{ref} 33

计算系数

for equivalent bearing load

f_0 16,4

for preload in mounted bearing sets

f 1,27

f_1 1

f_{2A} 1





f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04

参考资料: <http://www.sozhou.com/p/384cf314.html>

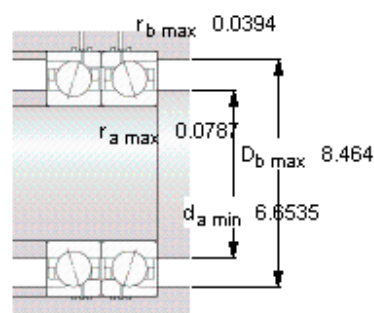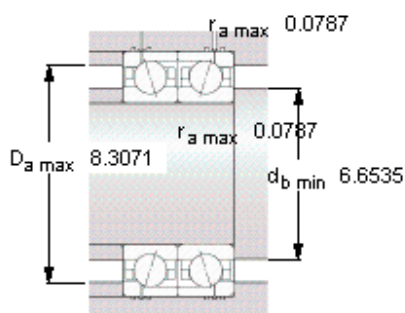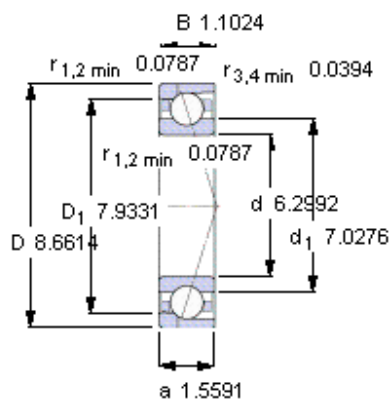

Ball diameter 19,05

Number of balls 28

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
490	980	1960	3920

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
184	252	357	523

Reference grease quantity [cm³]

G_{ref} 33

计算系数

for equivalent bearing load

f₀ 16,4

for preload in mounted bearing sets

f 1,27

f₁ 1

f_{2A} 1

f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04