
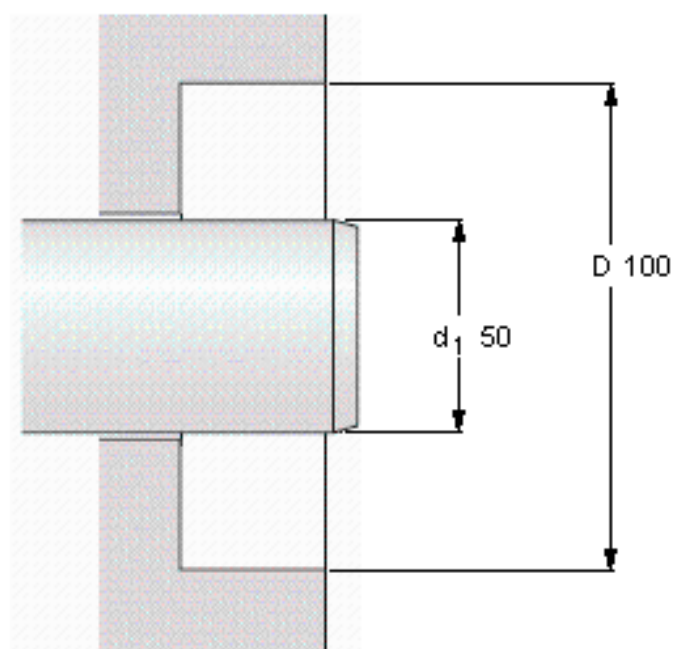


SKF 50x100x10 HMS5 V参数

主要尺寸	d ₁	50	mm	—
	d1	100	mm	—
	b	10	mm	—
设计	设计	HMS5	—	—
密封唇材料	密封唇材料	V	—	—
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.03	—	—
型号	型号	50x100x10 HMS5 V	—	—
美国图纸编号	美国图纸编号	—	—	—

SKF 50x100x10 HMS5 V图片

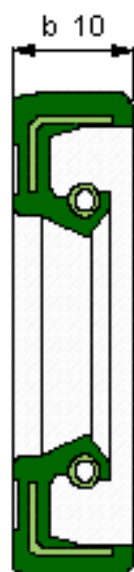

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 390
	short periods
	220 / 430



Rotational speed [r/min]

5348
at circumferential speed [m/s / ft/s]
14 / 45,92

Pressure differential [MPa / psi]

0,03 / 5

See also "Permissible speeds" and "Chemical and thermal resistance"

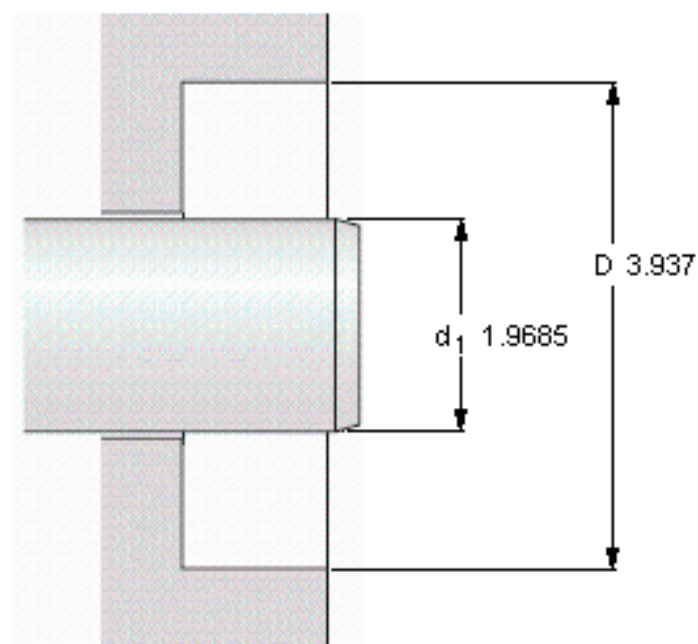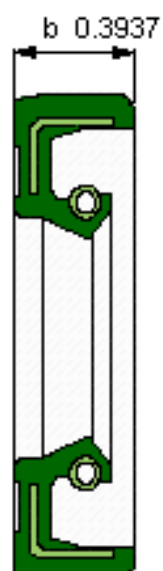

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 390
	short periods
	220 / 430

Rotational speed [r/min]

5348

at circumferential speed [m/s / ft/s]

14 / 45,92

Pressure differential [MPa / psi]

0,03 / 5

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/398cc3a6.html>