

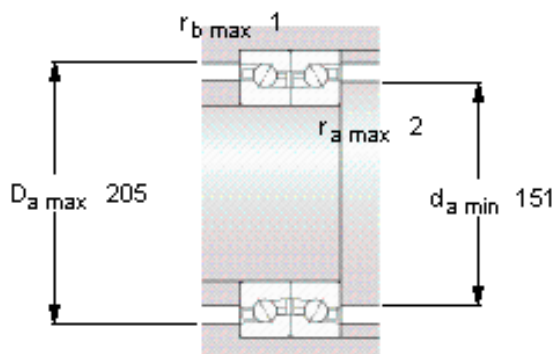


SKF BTM 140 BM/HCP4CDBA参数

主要尺寸	d	140	mm	—
	D	210	mm	—
	H	63	mm	—
基本额定载荷	C	86500	N	动载荷
	C_0	216000	N	静载荷
疲劳载荷极限	P_u	6950	N	—
可达转速	Grease	4900	r/min	—
	Oil-air	5800	r/min	—
重量	重量	7400	g	—
型号	型号	BTM 140 BM/HCP4CDBA	—	—

SKF BTM 140 BM/HCP4CDBA图片

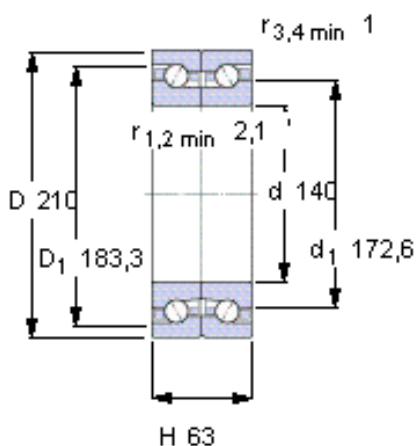

未安装时的预载荷 [N]

1050

Reference grease quantity [cm³]


G_{ref} 62

Static axial stiffness [N/μm]

(guideline value)

821

参考资料: <http://www.sozhou.com/p/3d25c722.html>

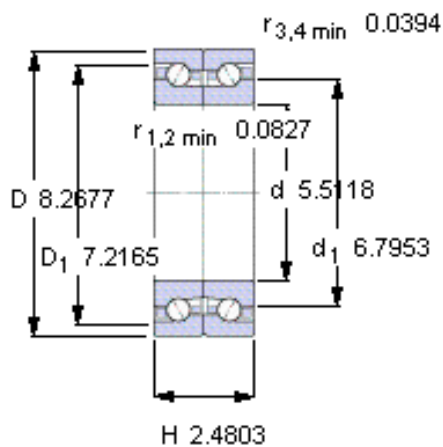


未安装时的预载荷 [N]

1050

Reference grease quantity [cm³]

G_{ref} 62

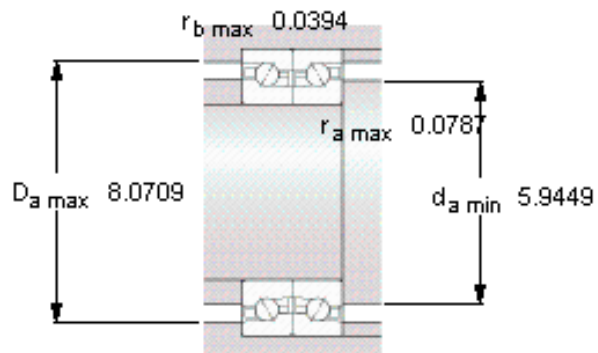

Static axial stiffness [N/μm]

(guideline value)

821

