


### FAG 293/800-E-MB参数

尺寸	d	800	mm	-
	D	1180	mm	-
	T	230	mm	-
	A	440	mm	-
	D <sub>1</sub>	961	mm	-
	D <sub>a max</sub>	1070	mm	-
	D <sub>b min</sub>	1202	mm	-
	d <sub>1</sub>	1100	mm	-
	d <sub>a min</sub>	970	mm	-
	d <sub>b max</sub>	842	mm	-
	r <sub>a max</sub>	8	mm	-
	r <sub>min</sub>	9.5	mm	-
	T <sub>1</sub>	112	mm	-
	T <sub>2</sub>	83	mm	-
	T <sub>3</sub>	145.5	mm	-
	T <sub>4</sub>	165	mm	-
	重量	m	789900	g
基本额定载荷	C <sub>a</sub>	11600000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	56000000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	435	r/min	极限转速
参考转速	n <sub>B</sub>	235	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	2650000	N	疲劳极限载荷, 轴向

### FAG 293/800-E-MB图片

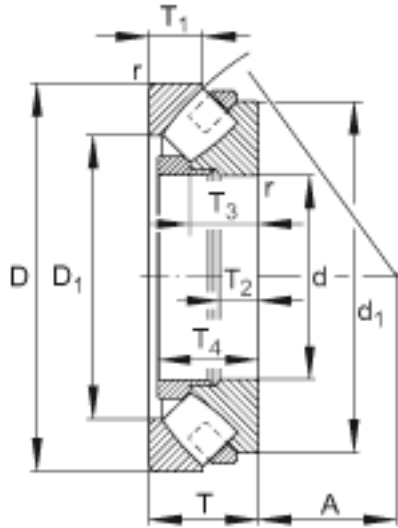

参考资料:<http://www.sozhou.com/p/3f2d1105.html>