


SKF NRT 200 A参数

主要尺寸	d	200	mm	-
	D	300	mm	-
	H	45	mm	-
基本额定载荷	C	93500	N	动载荷
	C_0	270000	N	静载荷
	C	85000	N	动载荷
	C_0	630000	N	静载荷
极限转速	Grease lubrication	170	r/min	-
	Oil lubrication	340	r/min	-
Guideline rotary table diameter	Guideline rotary table diameter	500	mm	-
重量	重量	9700	g	-
型号	型号	NRT 200 A	-	-

SKF NRT 200 A图片

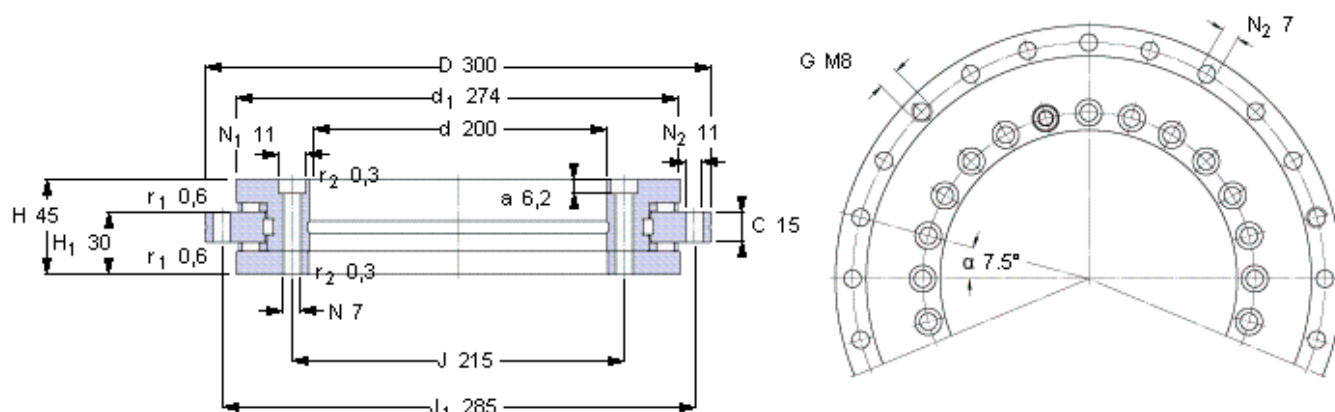

Axial preload [kN] (average value)	2,8
Axial unloading force [kN] (average value)	6,2
Frictional moment C_{RL} [Nm] (guideline value)	14
Stiffness (values refer to the roller set)	
Axial [kN/ μ m]	11,6
Radial [kN/ μ m]	6,5
Movement [kNm/mrad]	73



Retaining bolts 2 x M6 , 180°

Removal threads G 3 x M8 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 46 x 7.5°
with 2 positions omitted at 180° apart at retaining bolt positions
Housing (no. of bolts x pitch) 45 x 7.5°
with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
14 (M6)

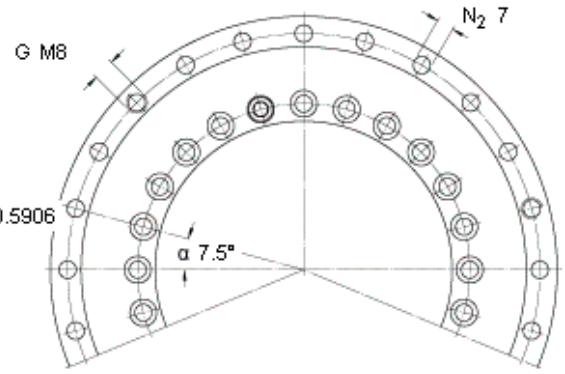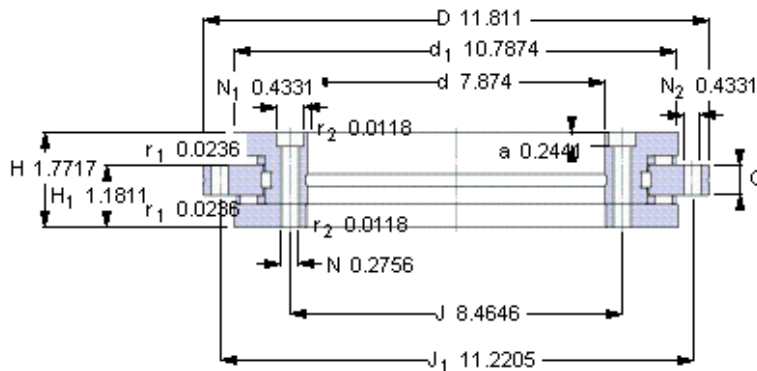

Axial preload [kN] 2,8
(average value)

Axial unloading force [kN] 6,2
(average value)

Frictional moment C_{RL} [Nm] 14
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 11,6
Radial [kN/ μ m] 6,5
Movement [kNm/mrad] 73

Retaining bolts 2 x M6 , 180°

Removal threads G 3 x M8 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 46 x 7.5°
with 2 positions omitted at 180° apart at retaining bolt positions
Housing (no. of bolts x pitch) 45 x 7.5°
with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
0.551 $\sqrt{}$ (M6)

参考资料: <http://www.sozhou.com/p/3f9031ff.html>