
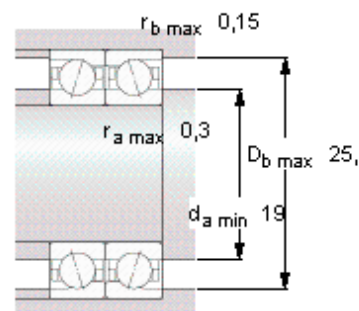
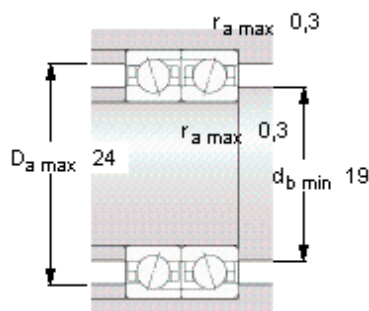



SKF 71803 CD/HCP4参数

主要尺寸	d	17	mm	—
	D	26	mm	—
	B	5	mm	—
基本额定载荷	C	2340	N	动载荷
	C_0	1600	N	静载荷
疲劳载荷极限	P_u	68	N	—
可达转速	Grease	63000	r/min	—
	Oil-air	100000	r/min	—
重量	重量	9	g	—
型号	型号	71803 CD/HCP4	—	—

SKF 71803 CD/HCP4图片

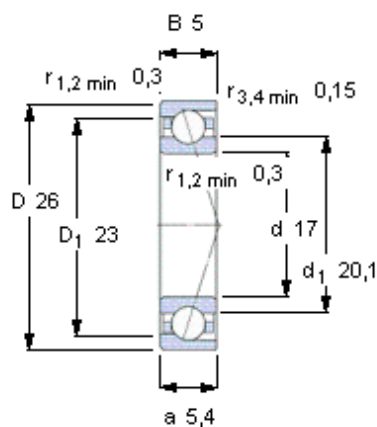

Ball diameter 2,381

Number of balls 18

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
9	27	55	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
20	34	50	-

Reference grease quantity [cm³]

G_{ref} 0,09

计算系数

for equivalent bearing load

f_0 16,2

for preload in mounted bearing sets

f 1,1

f_1 1





f_{2A} 1

f_{2B} 1,1

f_{2C} 1,18

f_{2D} -

f_{HC} 1,02

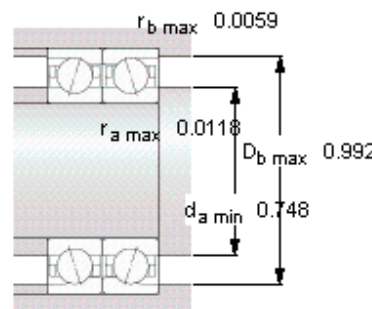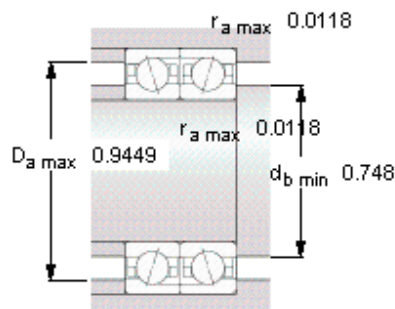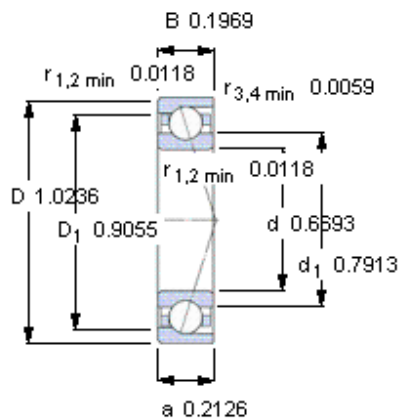

Ball diameter 2,381

Number of balls 18

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
9	27	55	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
20	34	50	-

Reference grease quantity [cm³]

G_{ref} 0,09

计算系数

for equivalent bearing load

f_0 16,2

for preload in mounted bearing sets

f 1,1

f_1 1

f_{2A} 1

f_{2B} 1,1

f_{2C} 1,18

f_{2D} -

f_{HC} 1,02