


FAG 29268-E-MB参数

基本额定载荷	C_{0a}	7100000	N	基本额定静载荷, 轴向
极限转速	n_G	1260	r/min	极限转速
尺寸	$D_{a \max}$	427	mm	-
	$D_{b \min}$	470	mm	-
	d_1	435	mm	-
	$d_{a \min}$	395	mm	-
	$d_{b \max}$	353	mm	-
	$r_{a \max}$	2.5	mm	-
	r_{\min}	3	mm	-
	T_1	37	mm	-
	T_2	26	mm	-
	T_3	45	mm	-
T_4	52	mm	-	
重量	m	31200	g	质量
基本额定载荷	C_a	1530000	N	基本额定动载荷, 轴向
参考转速	n_B	740	r/min	参考速度
疲劳极限载荷	C_{ua}	380000	N	疲劳极限载荷, 轴向
尺寸	d	340	mm	-
	D	460	mm	-
	T	73	mm	-
	A	183	mm	-
	D_1	391	mm	-

FAG 29268-E-MB图片

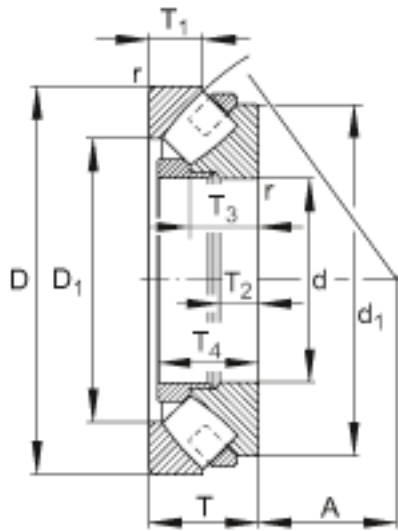

参考资料: <http://www.sozhou.com/p/462850da.html>