


SKF N 1022 KTN9/SP参数

主要尺寸	d	110	mm	—
	D	170	mm	—
	B	28	mm	—
基本额定载荷	C	128000	N	动载荷
	C_0	180000	N	静载荷
疲劳载荷极限	P_u	20800	N	—
极限转速	Grease	5600	r/min	—
	Oil-air	6300	r/min	—
重量	重量	2050	g	—
型号	型号	N 1022 KTN9/SP	—	—

SKF N 1022 KTN9/SP图片

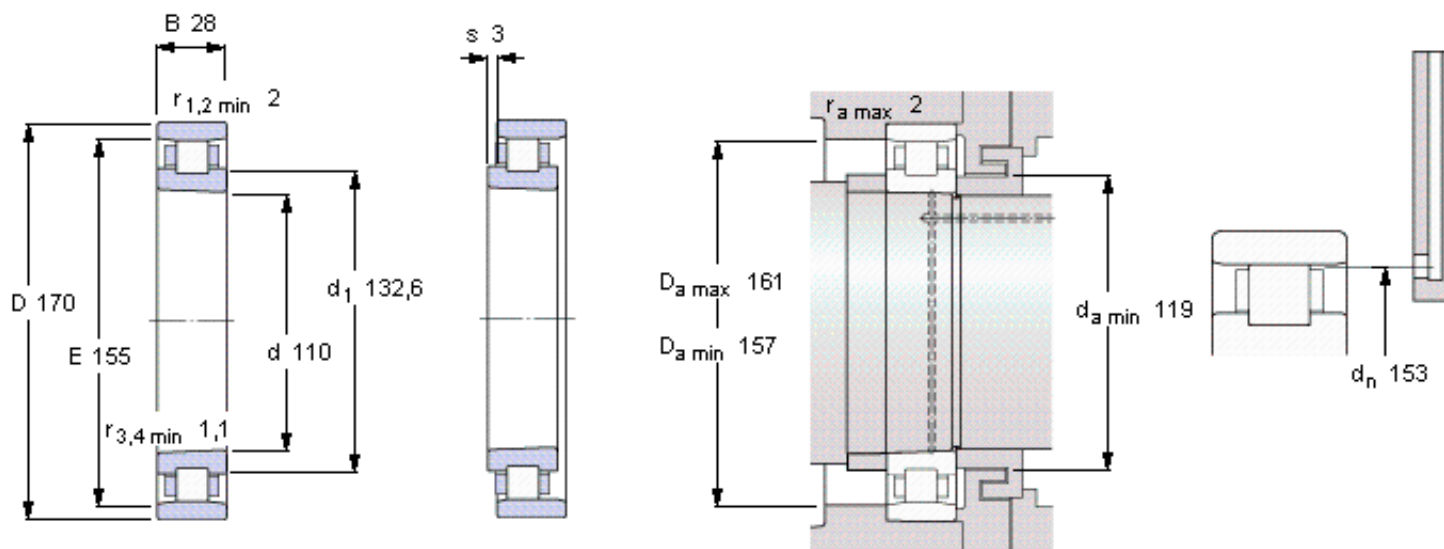

Tapered bore, taper 1:12

Reference grease quantity [cm³]



G_{ref} 21

Static radial stiffness [N/μm]

(guideline value)

1210

参考资料:<http://www.sozhou.com/p/46e78df6.html>

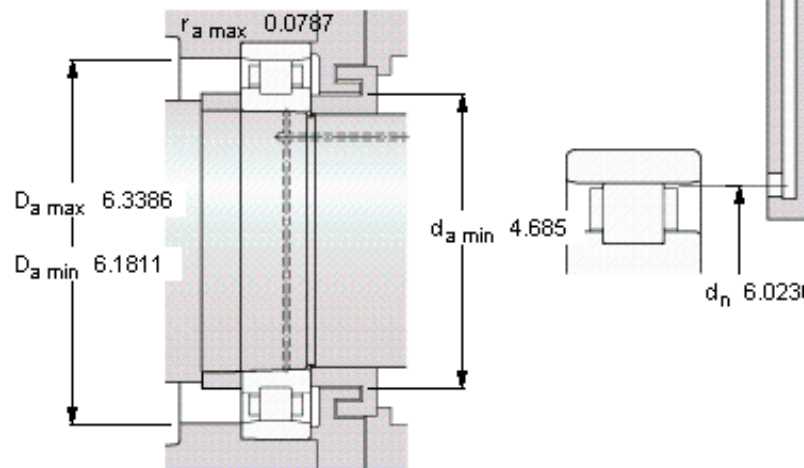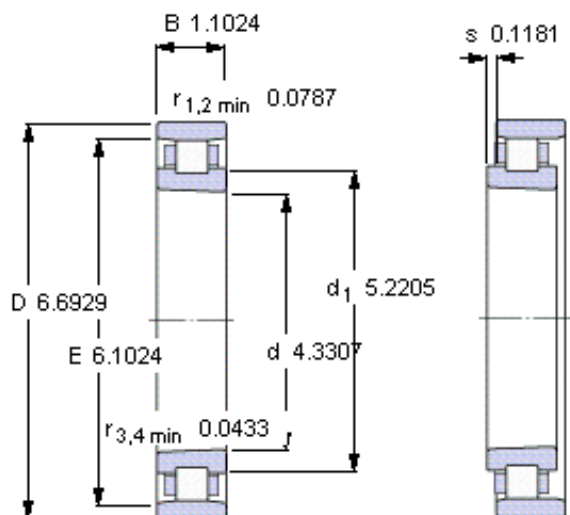

Tapered bore, taper 1:12

Reference grease quantity [cm³]

$G_{\text{ref}} = 21$

Static radial stiffness [N/μm]

(guideline value)

1210