


**SKF 14940参数**

主要尺寸	$d_1$	38.1	mm	-
	d1	57.15	mm	-
	b	7.95	mm	-
设计	设计	CRW1	-	-
密封唇材料	密封唇材料	V	-	-
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.07	-	-
型号	型号	14940	-	-
美国图纸编号	美国图纸编号	14940	-	-

**SKF 14940图片**

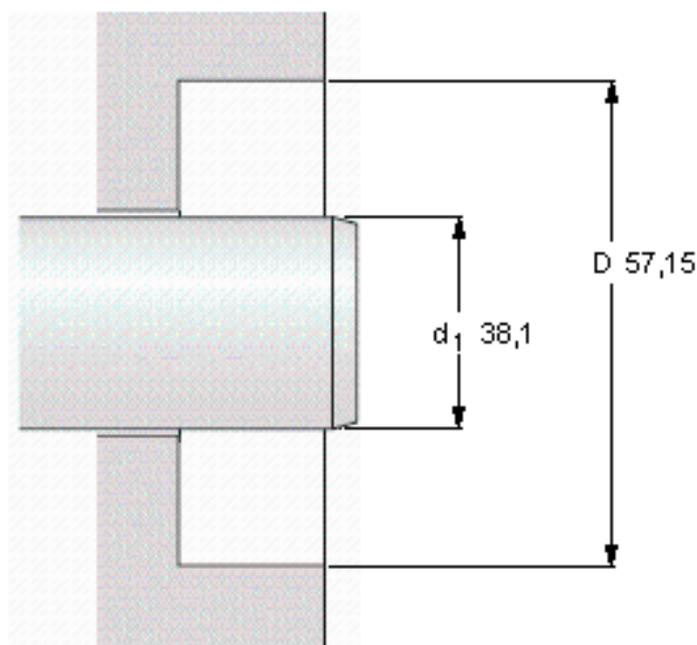

**Permissible operating temperature [°C / °F]**

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428



**Rotational speed [r/min]**

9023
<b>at circumferential speed [m/s / ft/s]</b>
18 / 59,04

**Pressure differential [MPa / psi]**

0,07 / 10,15

See also "Permissible speeds" and "Chemical and thermal resistance"

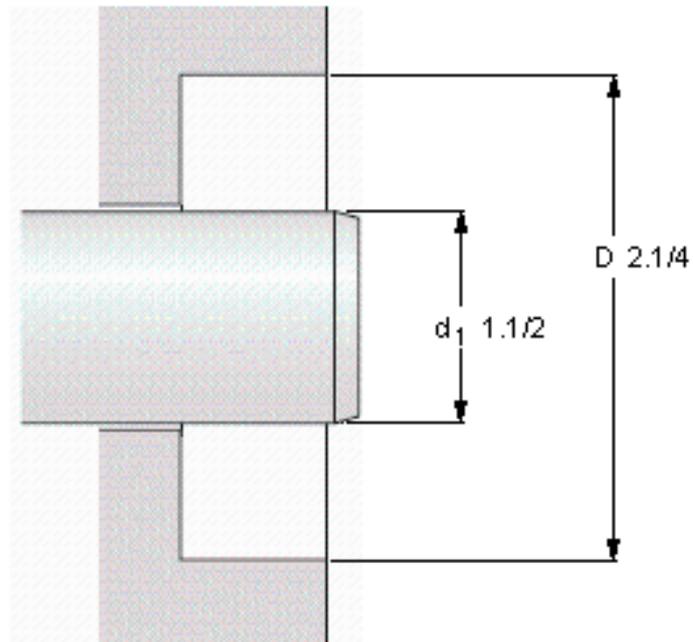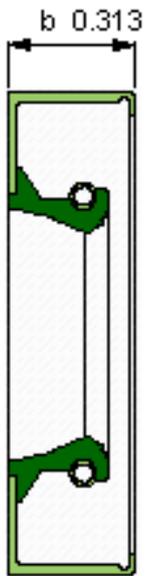

**Permissible operating temperature [°C / °F]**

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428

**Rotational speed [r/min]**

9023
<b>at circumferential speed [m/s / ft/s]</b>
18 / 59,04

**Pressure differential [MPa / psi]**

0,07 / 10,15

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/491818df.html>