

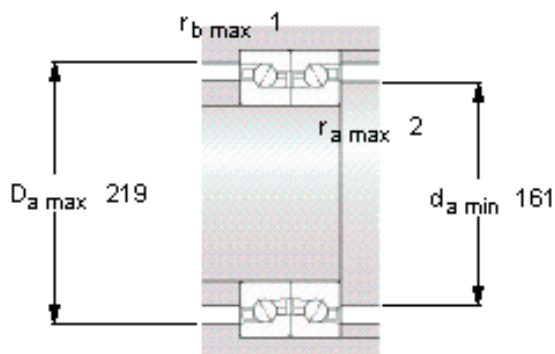


SKF BTM 150 AM/P4CDBB参数

主要尺寸	d	150	mm	-
	D	225	mm	-
	H	67.5	mm	-
基本额定载荷	C	86500	N	动载荷
	C_0	228000	N	静载荷
疲劳载荷极限	P_u	7100	N	-
可达转速	Grease	3100	r/min	-
	Oil-air	4000	r/min	-
重量	重量	9600	g	-
型号	型号	BTM 150 AM/P4CDBB	-	-

SKF BTM 150 AM/P4CDBB图片

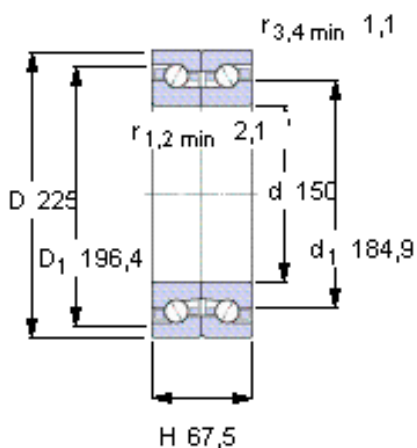

未安装时的预载荷 [N]

3000

Reference grease quantity [cm³]




G_{ref} 80

Static axial stiffness [N/ μm]

(guideline value)

733

参考资料:<http://www.sozhou.com/p/4e1ca2ba.html>

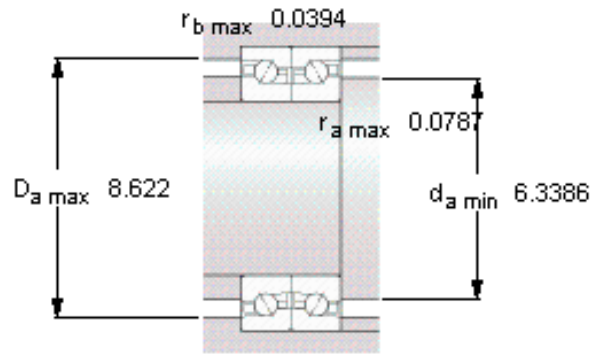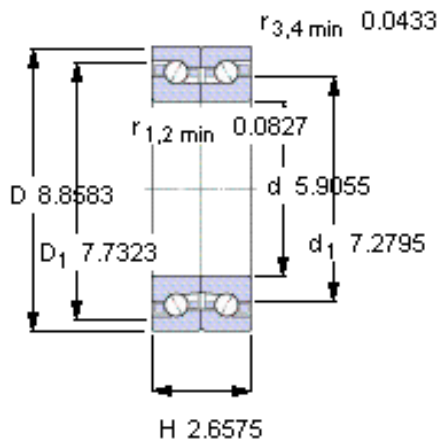

未安装时的预载荷 [N]

3000

Reference grease quantity [cm³]

G_{ref} 80

Static axial stiffness [N/ μm]

(guideline value)

733