
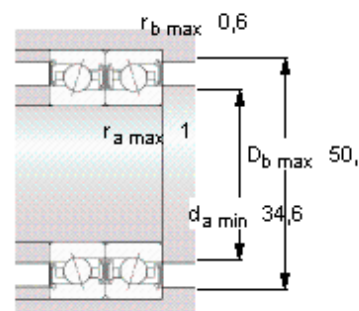
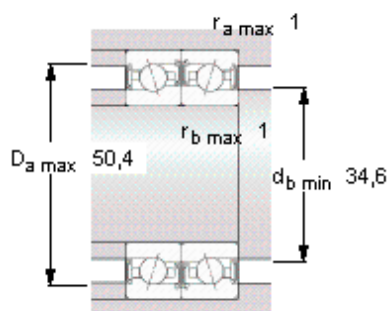


SKF S7006 CE/HCP4A参数

主要尺寸	d	30	mm	—
	D	55	mm	—
	B	13	mm	—
基本额定载荷	C	9360	N	动载荷
	C_0	5200	N	静载荷
疲劳载荷极限	P_u	220	N	—
可达转速	Grease	47000	r/min	—
	Oil-air	—	r/min	—
重量	重量	110	g	—
型号	型号	S7006 CE/HCP4A	—	—

SKF S7006 CE/HCP4A图片

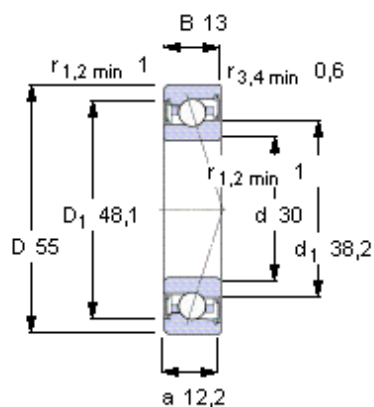

Ball diameter 6,35
Number of balls 17

未安装时的预载荷 [N]
背对背配置，面对面配置
预载荷等级

A	B	C	D
50	150	300	-

Static axial stiffness [N/μm]
(guideline value)

预载荷等级




A	B	C	D
31	49	67	-

Reference grease quantity [cm³]
 G_{ref} -

计算系数
for equivalent bearing load
 f_0 7,9

for preload in mounted bearing sets
 f 1,05
 f_1 1
 f_{2A} 1
 f_{2B} 1,03
 f_{2C} 1,05
 f_{2D} -
 f_{HC} 1,01

参考资料: <http://www.sozhou.com/p/4ed0f00a.html>

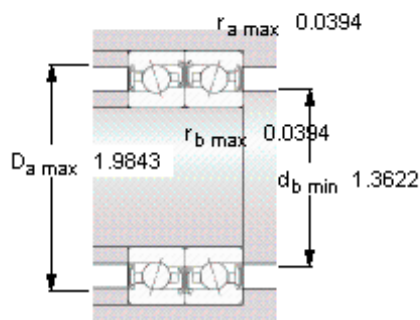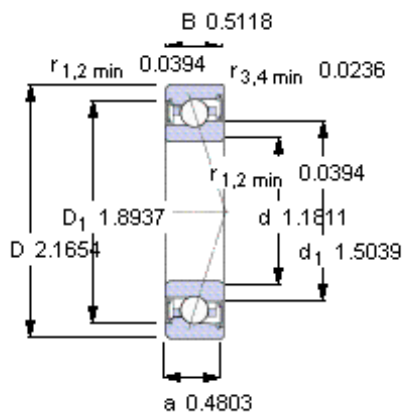

Ball diameter 6,35

Number of balls 17

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
50	150	300	-

Static axial stiffness [N/ μ m]

(guideline value)

预载荷等级

A	B	C	D
31	49	67	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 7,9

for preload in mounted bearing sets

f 1,05

f_1 1

f_{2A} 1

f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1,01