

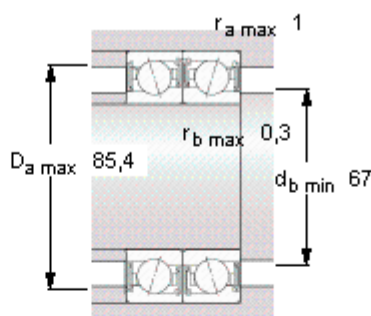


SKF S71913 CE/P4A参数

主要尺寸	d	65	mm	—
	D	90	mm	—
	B	13	mm	—
基本额定载荷	C	16500	N	动载荷
	C_0	12500	N	静载荷
疲劳载荷极限	P_u	530	N	—
可达转速	Grease	20000	r/min	—
	Oil-air	—	r/min	—
重量	重量	200	g	—
型号	型号	S71913 CE/P4A	—	—

SKF S71913 CE/P4A图片

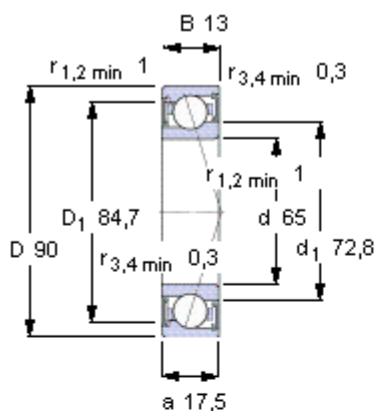

Ball diameter 7,938

Number of balls 24

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
89	266	532	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
47	76	105	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 8,5

for preload in mounted bearing sets

f 1,19

f_1 1




f_{2A} 1

f_{2B} 1,04

f_{2C} 1,08

f_{2D} -

f_{HC} 1

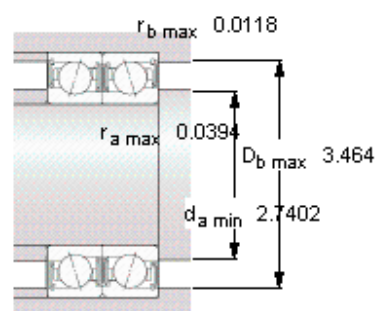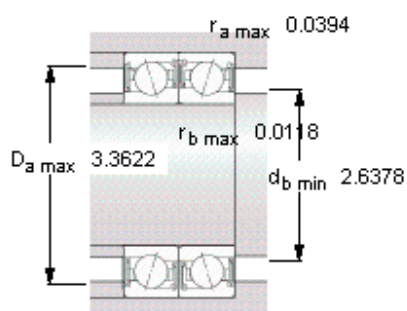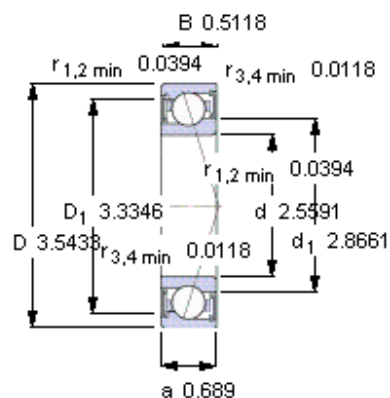

Ball diameter 7,938

Number of balls 24

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
89	266	532	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
47	76	105	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f₀ 8,5

for preload in mounted bearing sets

f 1,19

f₁ 1

f_{2A} 1

f_{2B} 1,04

f_{2C} 1,08

f_{2D} -

f_{HC} 1