

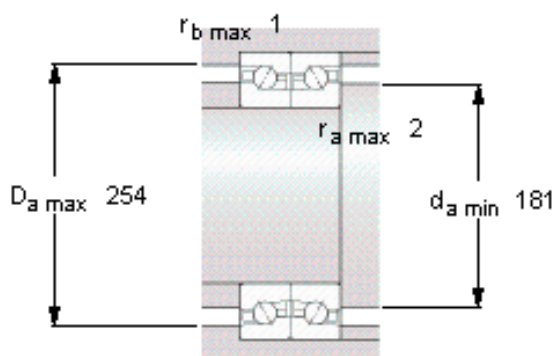


SKF BTM 170 AM/HCP4CDBB参数

主要尺寸	d	170	mm	—
	D	260	mm	—
	H	81	mm	—
基本额定载荷	C	118000	N	动载荷
	C_0	315000	N	静载荷
疲劳载荷极限	P_u	9150	N	—
可达转速	Grease	3400	r/min	—
	Oil-air	4000	r/min	—
重量	重量	15000	g	—
型号	型号	BTM 170 AM/HCP4CDBB	—	—

SKF BTM 170 AM/HCP4CDBB图片

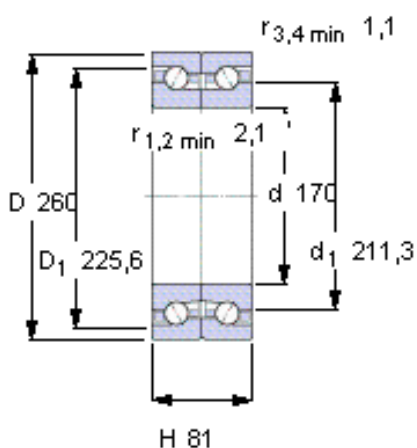

未安装时的预载荷 [N]

4050

Reference grease quantity [cm³]


G_{ref} 126

Static axial stiffness [N/μm]

(guideline value)

925

参考资料: <http://www.sozhou.com/p/60d29d59.html>

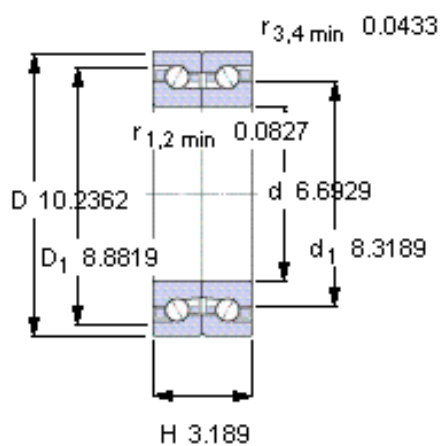


未安装时的预载荷 [N]

4050

Reference grease quantity [cm³]

G_{ref} 126

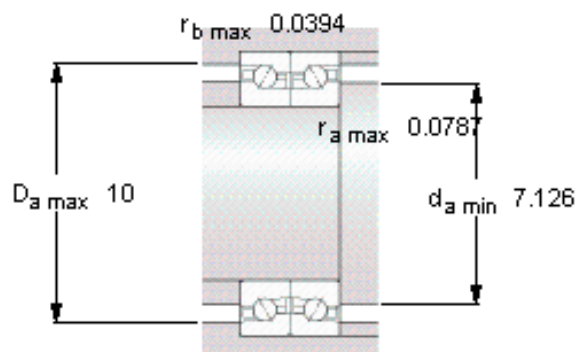

Static axial stiffness [N/μm]

(guideline value)

925

