
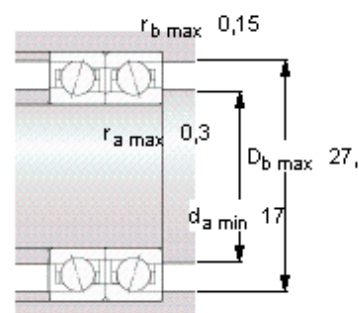
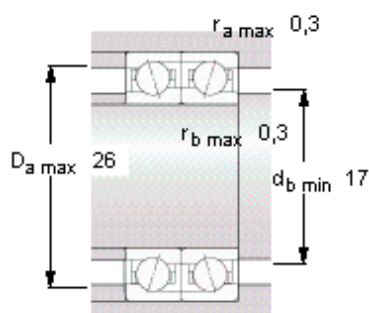



SKF 71902 CE/P4A参数

主要尺寸	d	15	mm	—
	D	28	mm	—
	B	7	mm	—
基本额定载荷	C	3190	N	动载荷
	C_0	1400	N	静载荷
疲劳载荷极限	P_u	60	N	—
可达转速	Grease	75000	r/min	—
	Oil-air	115000	r/min	—
重量	重量	15	g	—
型号	型号	71902 CE/P4A	—	—

SKF 71902 CE/P4A图片

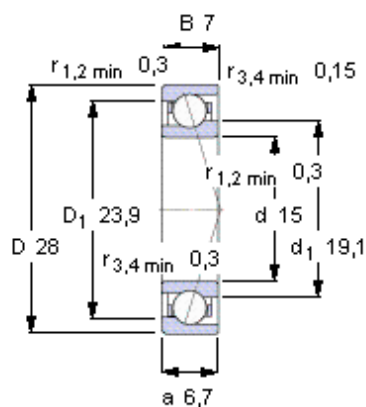

Ball diameter 3,969
Number of balls 12

未安装时的预载荷 [N]
背对背配置，面对面配置
预载荷等级

A	B	C	D
17	51	102	-

Static axial stiffness [N/μm]
(guideline value)

预载荷等级

A	B	C	D
13	21	29	-





Reference grease quantity [cm³]
 G_{ref} 0,2

计算系数
for equivalent bearing load
 f_0 7,7

for preload in mounted bearing sets

f	1,04
f_1	1
f_{2A}	1
f_{2B}	1,04
f_{2C}	1,08
f_{2D}	-
f_{HC}	1

参考资料:<http://www.sozhou.com/p/6b4b2777.html>

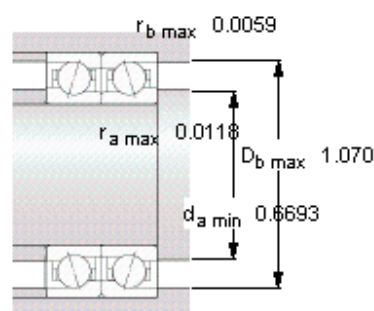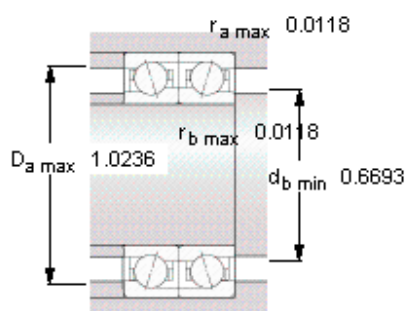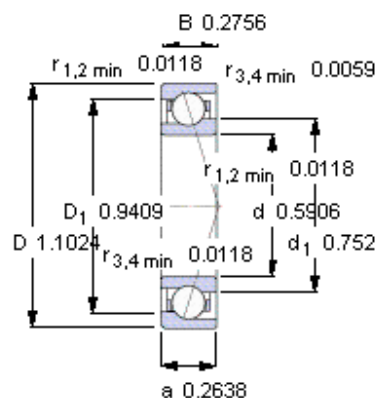

Ball diameter 3,969

Number of balls 12

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
17	51	102	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
13	21	29	-

Reference grease quantity [cm³]

G_{ref} 0,2

计算系数

for equivalent bearing load

f₀ 7,7

for preload in mounted bearing sets

f 1,04

f₁ 1

f_{2A} 1

f_{2B} 1,04

f_{2C} 1,08

f_{2D} -

f_{HC} 1