


## SKF OH 39/530 HE参数

|      |              |               |    |   |
|------|--------------|---------------|----|---|
| 主要尺寸 | $d_1$        | 500           | mm | — |
|      | $d$          | 530           | mm | — |
|      | $d_3$        | 630           | mm | — |
|      | $B_1$        | 216           | mm | — |
|      | G            | Tr 530x6      | —  | — |
| 重量   | 重量           | 87900         | g  | — |
| 型号   | 带螺母和锁定装置的紧定套 | OH 39/530 HE  | —  | — |
|      | 附属锁定螺母       | HME 30/530    | —  | — |
|      | 附属锁定装置       | MS 30/600-530 | —  | — |
|      | 适当的液压螺母      | HMV 106 E     | —  | — |

## SKF OH 39/530 HE图片

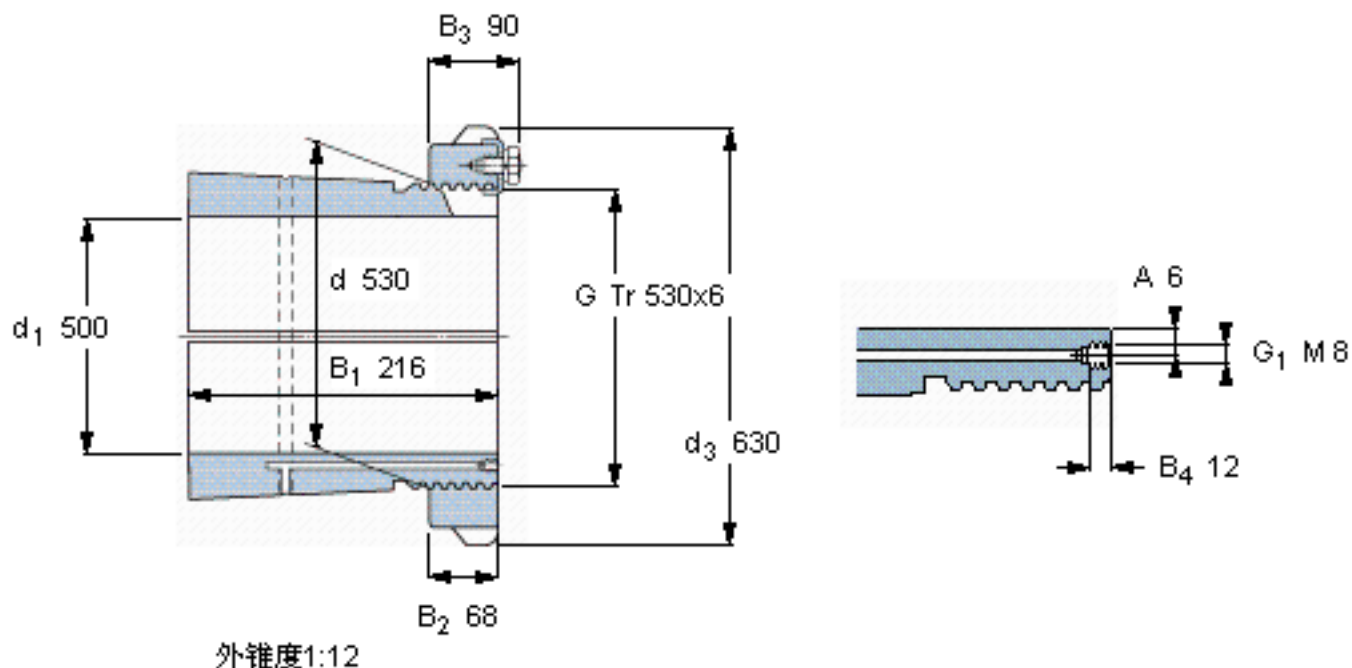

参考资料: <http://www.sozhou.com/p/6b9de2f2.html>

