
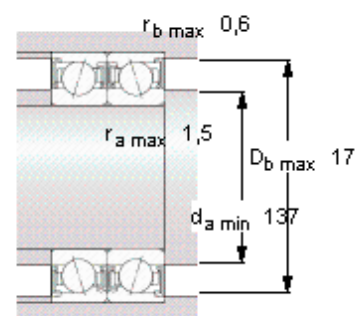
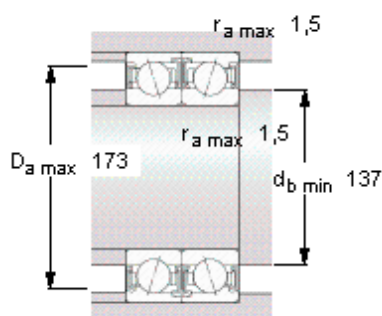


SKF S71926 CD/HCP4A参数

主要尺寸	d	130	mm	—
	D	180	mm	—
	B	24	mm	—
基本额定载荷	C	92300	N	动载荷
	C_0	108000	N	静载荷
疲劳载荷极限	P_u	3650	N	—
可达转速	Grease	8500	r/min	—
	Oil-air	—	r/min	—
重量	重量	1300	g	—
型号	型号	S71926 CD/HCP4A	—	—

SKF S71926 CD/HCP4A图片

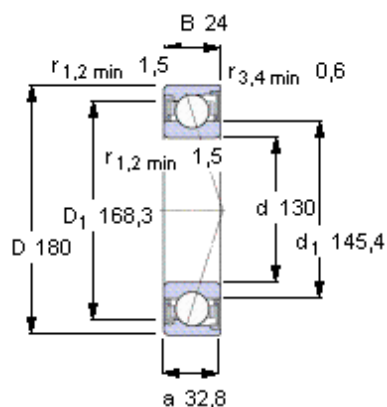

Ball diameter 15,875

Number of balls 27

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
350	700	1400	2800

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
152	208	295	434

Reference grease quantity [cm³]

G_{ref} —

计算系数

for equivalent bearing load

f_0 16,4

for preload in mounted bearing sets

f 1,25

f_1 1

f_{2A} 1




f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04

参考资料: <http://www.sozhou.com/p/6f8bac51.html>

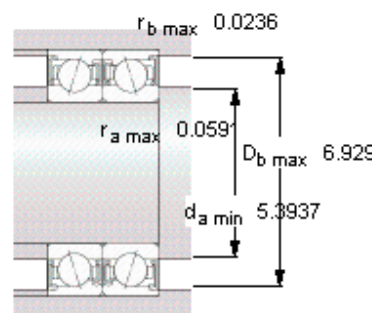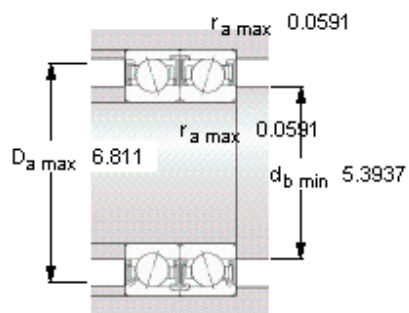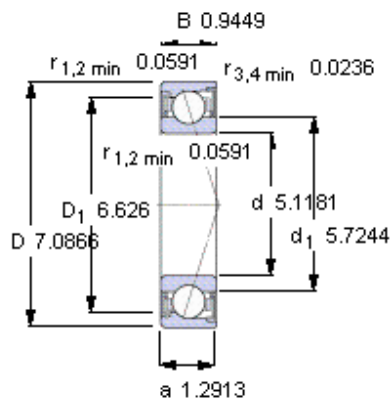

Ball diameter 15,875

Number of balls 27

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
350	700	1400	2800

Static axial stiffness [N/ μ m]

(guideline value)

预载荷等级

A	B	C	D
152	208	295	434

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 16,4

for preload in mounted bearing sets

f 1,25

f_1 1

f_{2A} 1

f_{2B} 1,07

f_{2C} 1,12

f_{2D} 1,18

f_{HC} 1,04