


SKF 240/500 ECAK30/W33 + AOH 240/500 \*参数

|        |             |                                       |       |     |
|--------|-------------|---------------------------------------|-------|-----|
| 主要尺寸   | $d_1$       | 480                                   | mm    | -   |
|        | D           | 720                                   | mm    | -   |
|        | B           | 218                                   | mm    | -   |
| 基本额定载荷 | C           | 5500000                               | N     | 动载荷 |
|        | $C_0$       | 11000000                              | N     | 静载荷 |
| 疲劳载荷极限 | $P_u$       | 735000                                | N     | -   |
| 额定转速   | 参考转速        | 430                                   | r/min | -   |
|        | 极限转速        | 700                                   | r/min | -   |
| 重量     | 重量          | 325000                                | g     | -   |
| 型号     | * SKF 探索者轴承 | 240/500 ECAK30/W33 +<br>AOH 240/500 * | -     | -   |

SKF 240/500 ECAK30/W33 + AOH 240/500 \*图片

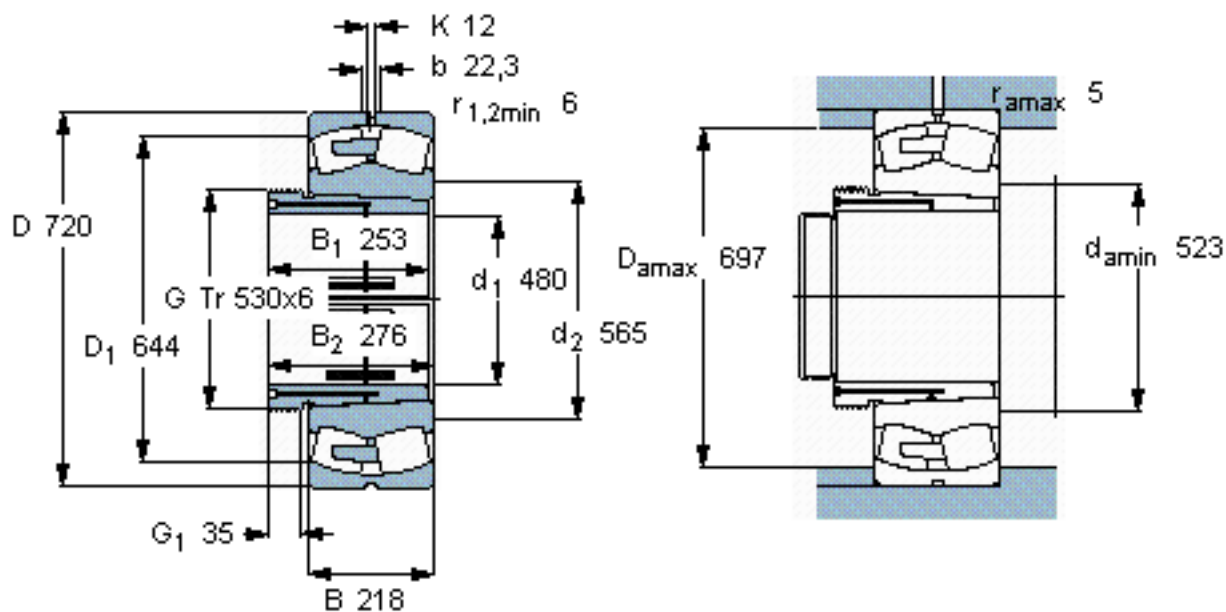

参考资料:<http://www.sozhou.com/p/72b29d62.html>

