
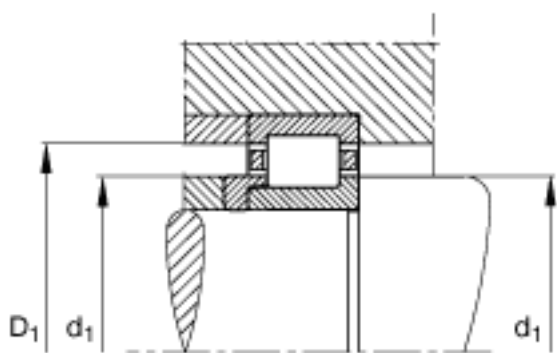


FAG NJ2232-E-M1 + HJ2232-E参数

尺寸	d	160	mm	-	
	D	290	mm	-	
	B	80	mm	-	
	B ₁	12	mm	-	
	B ₂	24.5	mm	-	
	D ₁	251.1	mm	-	
	D _{a max}	276	mm	-	
	d ₁	205.5	mm	-	
	d _{a max}	192	mm	-	
	d _{a min}	174	mm	-	
	d _{c min}	210	mm	-	
	E	261	mm	-	
	F	193	mm	-	
	r _{1 min}	3	mm	-	
	r _{a max}	2.5	mm	-	
	r _{al max}	2.5	mm	-	
	r _{min}	3	mm	-	
	s	7.2	mm	距离中心位置的轴向偏移	
	说明		HJ2232-E		型号, L 型圈
	重量	m	24100	g	质量
m ₁		1560	g	质量, L 型圈	
基本额定载荷	C _r	940000	N	基本额定动载荷, 径向	
	C _{0r}	1170000	N	基本额定静载荷, 径向	
极限转速	n _G	3600	r/min	极限转速	
参考转速	n _B	1680	r/min	参考速度	
疲劳极限载荷	C _{ur}	184000	N	疲劳极限载荷, 径向	

FAG NJ2232-E-M1 + HJ2232-E图片

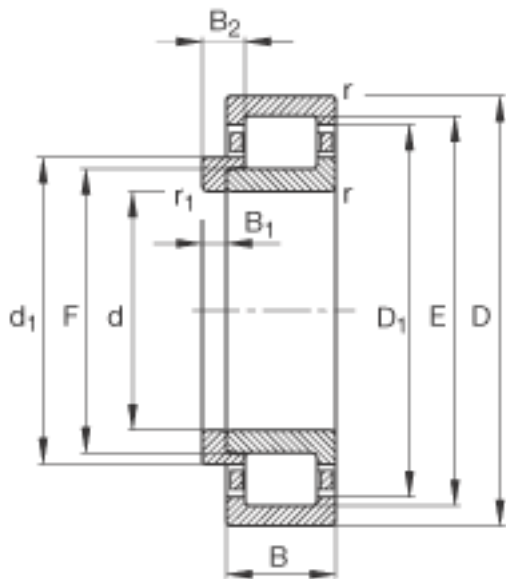

参考资料:<http://www.sozhou.com/p/73053985.html>

