


SKF 71924 CE/P4A参数

主要尺寸	d	120	mm	—
	D	165	mm	—
	B	22	mm	—
基本额定载荷	C	47500	N	动载荷
	C_0	40500	N	静载荷
疲劳载荷极限	P_u	1400	N	—
可达转速	Grease	11200	r/min	—
	Oil-air	16000	r/min	—
重量	重量	1100	g	—
型号	型号	71924 CE/P4A	—	—

SKF 71924 CE/P4A图片

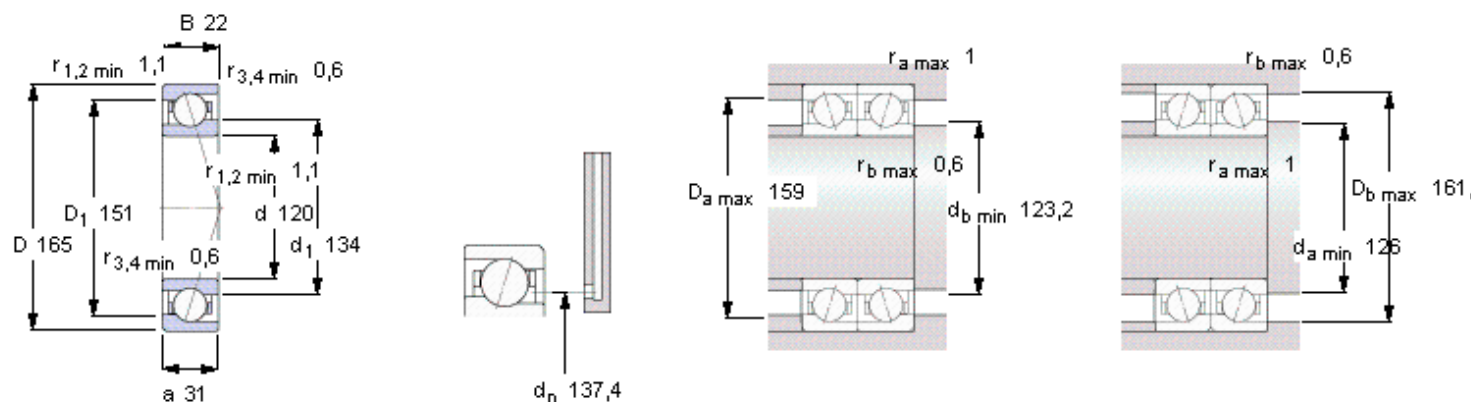

Ball diameter 14,288

Number of balls 24

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
250	760	1530	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
82	129	179	-

Reference grease quantity [cm³]

G_{ref} 15

计算系数

for equivalent bearing load

f_0 8,5

for preload in mounted bearing sets

f 1,18

f_1 1

f_{2A} 1





f_{2B} 1,04

f_{2C} 1,08

f_{2D} -

f_{HC} 1

参考资料: <http://www.sozhou.com/p/7325b964.html>

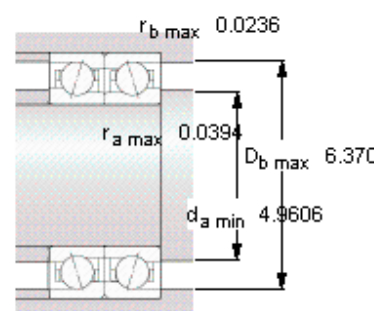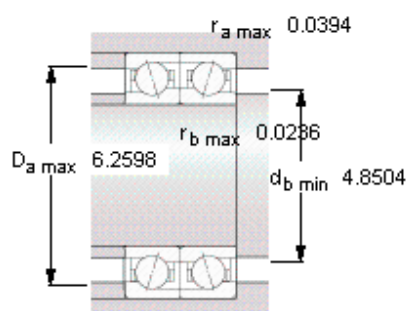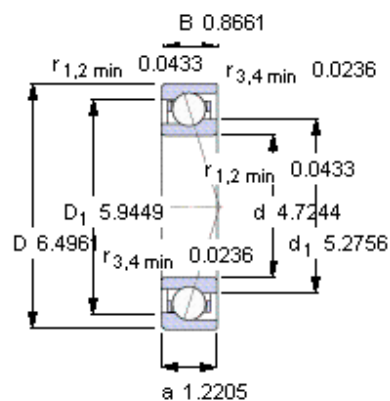

Ball diameter 14,288

Number of balls 24

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
250	760	1530	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
82	129	179	-

Reference grease quantity [cm³]

G_{ref} 15

计算系数

for equivalent bearing load

f₀ 8,5

for preload in mounted bearing sets

f 1,18

f₁ 1

f_{2A} 1

f_{2B} 1,04

f_{2C} 1,08

f_{2D} -

f_{HC} 1