


SKF BMB-6202/032S2/UB008A参数

主要尺寸	d	15	mm	-
	D	35	mm	-
	B	11	mm	-
基本额定载荷	C	8060	N	动载荷
	C_0	3750	N	静载荷
疲劳载荷极限	P_u	0.16		-
额定转速	极限转速	14000	r/min	-
传感器装置	脉冲号	32		-
	周期精度	± 3		-
	相移	90 ± 30	度	-
重量	重量	50	g	-
型号	型号	BMB-6202/032S2/UB008A		-

SKF BMB-6202/032S2/UB008A图片

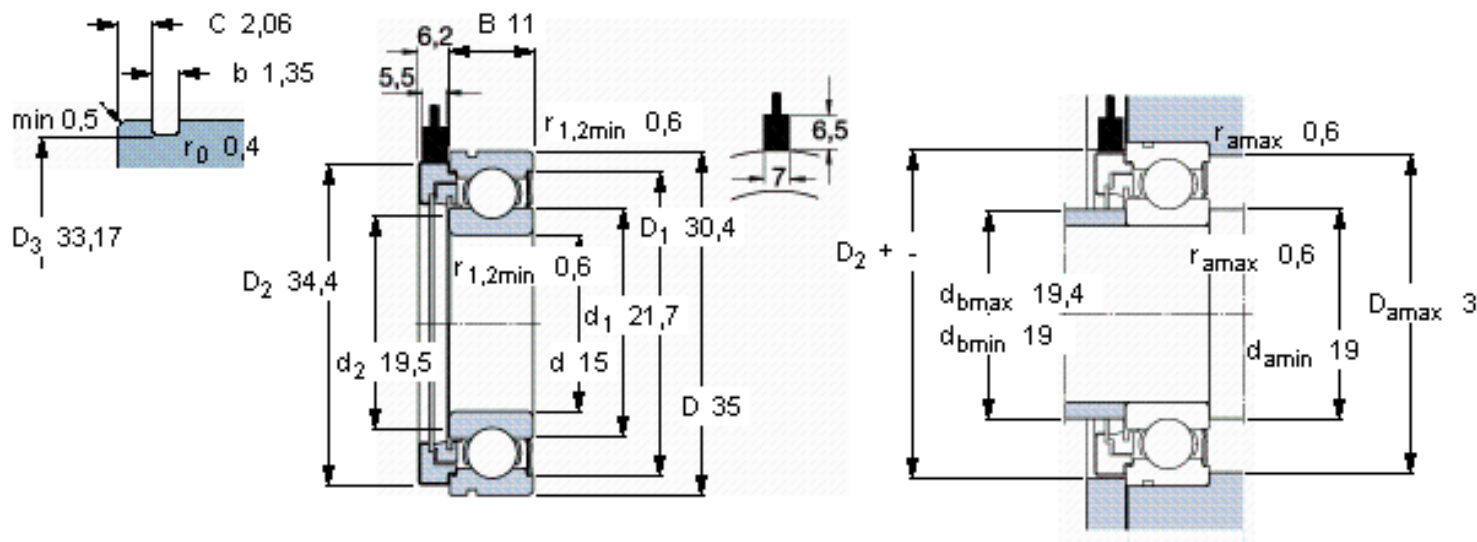

计算系数

k_r	0,025
f_0	13


盖尾端孔径

$\geq D_2 + 1 \text{ mm}$

适宜的止动环


SP 35

参考资料:<http://www.sozhou.com/p/76a48163.html>

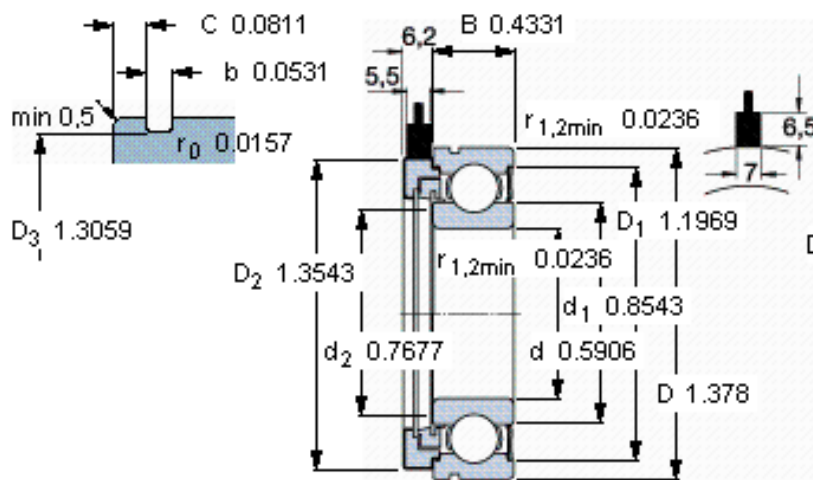

计算系数

k_r	0,025
f_0	13

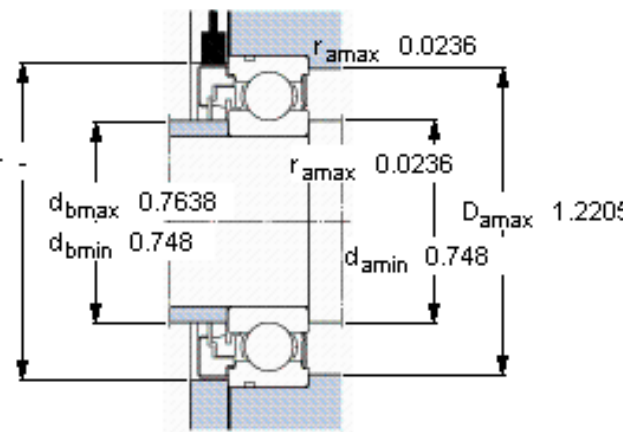

盖尾端孔径

$\geq D_2 + 1 \text{ mm}$

适宜的止动环

SP 35