


SKF BSA 308 C参数

主要尺寸	d	40	mm	-
	D	90	mm	-
	H	23	mm	-
基本额定载荷	C	67000	N	动载荷
	C_0	180000	N	静载荷
疲劳载荷极限	P_u	6700	N	-
可达转速	Grease lubrication	5300	r/min	-
	Oil-air lubrication	7000	r/min	-
重量	重量	770	g	-
型号	型号	BSA 308 C	-	-

SKF BSA 308 C图片

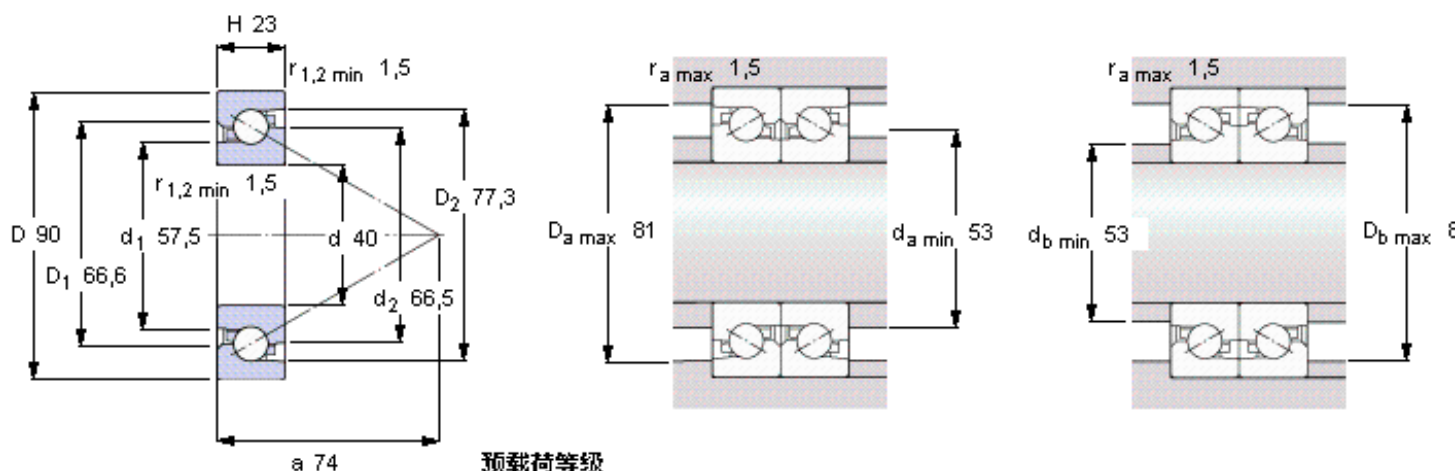

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级

	A	B
Preload ¹⁾ [N]	5100	10200
Frictional moment ¹⁾ [Nm]	0,35	0,62
Static axial stiffness ¹⁾ [N/μm]	1340	1710




Max. axial load carrying capacity
(guideline value)

78,2

Reference grease quantity [cm³]

G_{ref} 6,4

参考资料: <http://www.sozhou.com/p/79dab899.html>

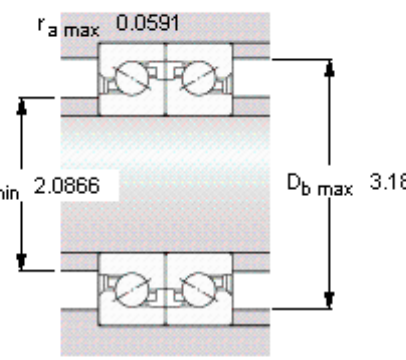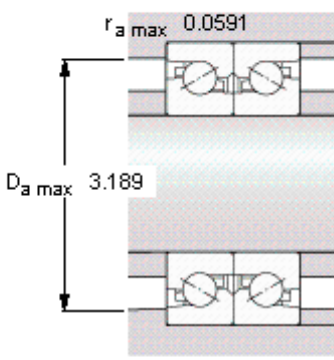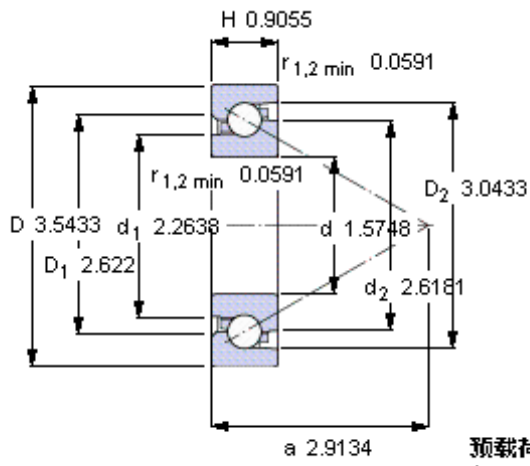

预载荷等级

	A	B
Preload¹⁾ [N]	5100	10200
Frictional moment¹⁾ [Nm] (guideline value)	0,35	0,62
Static axial stiffness¹⁾ [N/μm] (guideline value)	1340	1710

Max. axial load carrying capacity (guideline value)	78,2
Reference grease quantity [cm³] G _{ref}	6,4

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face