

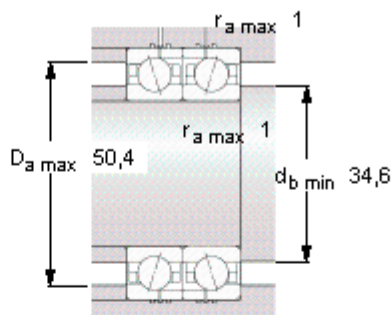



SKF 7006 CD/HCP4AH参数

主要尺寸	d	30	mm	—
	D	55	mm	—
	B	13	mm	—
基本额定载荷	C	14300	N	动载荷
	C_0	8000	N	静载荷
疲劳载荷极限	P_u	340	N	—
可达转速	Grease	38000	r/min	—
	Oil-air	56000	r/min	—
重量	重量	95	g	—
型号	型号	7006 CD/HCP4AH	—	—

SKF 7006 CD/HCP4AH图片

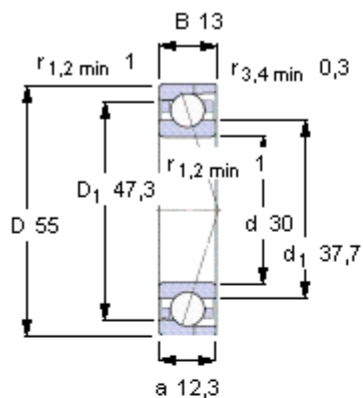

Ball diameter 7,938

Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
50	100	200	400

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
34	45	61	85

Reference grease quantity [cm³]

G_{ref} 1,6

计算系数

for equivalent bearing load

f_0 9,4

for preload in mounted bearing sets

f 1,06

f_1 1





f_{2A} 1

f_{2B} 1,02

f_{2C} 1,05

f_{2D} 1,09

f_{HC} 1,02

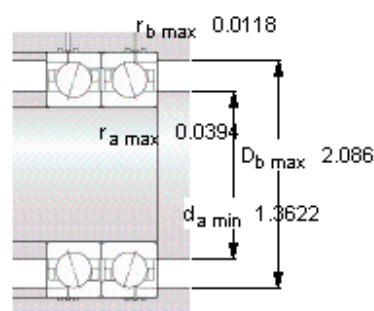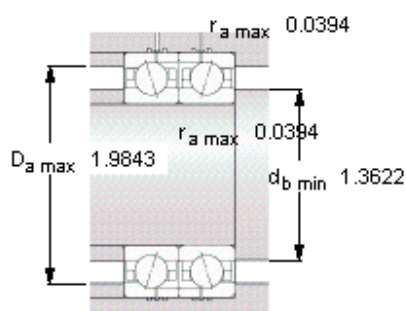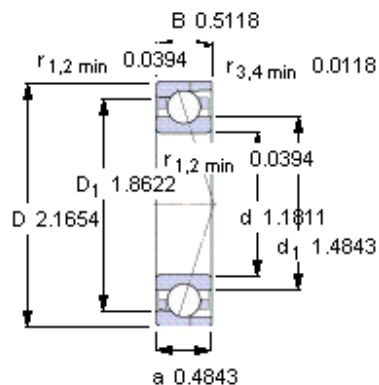

Ball diameter 7,938
Number of balls 14

未安装时的预载荷 [N]
 背对背配置，面对面配置
 预载荷等级

A	B	C	D
50	100	200	400

Static axial stiffness [N/μm]
 (guideline value)

预载荷等级	A	B	C	D
	34	45	61	85

Reference grease quantity [cm³]
 G_{ref} 1,6

计算系数
for equivalent bearing load
 f₀ 9,4

for preload in mounted bearing sets

f	1,06
f ₁	1
f _{2A}	1
f _{2B}	1,02
f _{2C}	1,05
f _{2D}	1,09
f _{HC}	1,02