
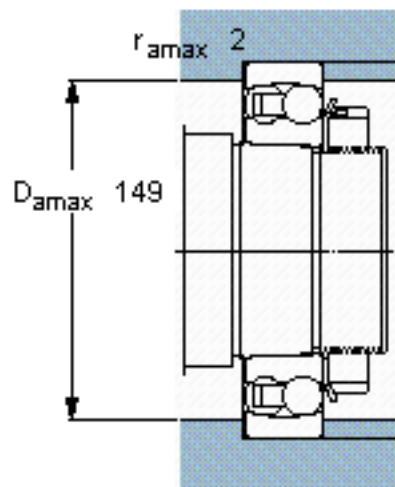


SKF 2218 K参数

| | | | | |
|--------|-------|--------|-------|-----|
| 主要尺寸 | d | 90 | mm | - |
| | D | 160 | mm | - |
| | B | 40 | mm | - |
| 基本额定载荷 | C | 70200 | N | 动载荷 |
| | C_0 | 28500 | N | 静载荷 |
| 疲劳载荷极限 | P_u | 1320 | N | - |
| 额定转速 | 参考转速 | 7500 | r/min | - |
| | 极限转速 | 5300 | r/min | - |
| 重量 | 重量 | 3200 | g | - |
| 型号 | 型号 | 2218 K | - | - |

SKF 2218 K图片


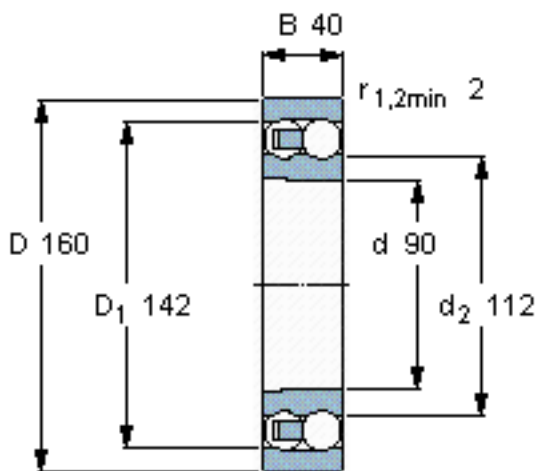


计算系数

e 0,27
Y₁ 2,3
Y₂ 3,6
Y₀ 2,5

圆锥孔，圆锥
1: 12

参考资料:<http://www.sozhou.com/p/7a8598eb.html>

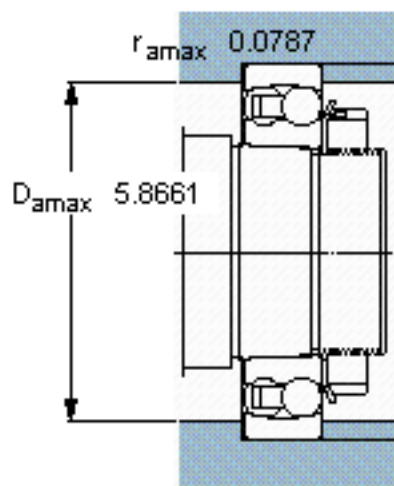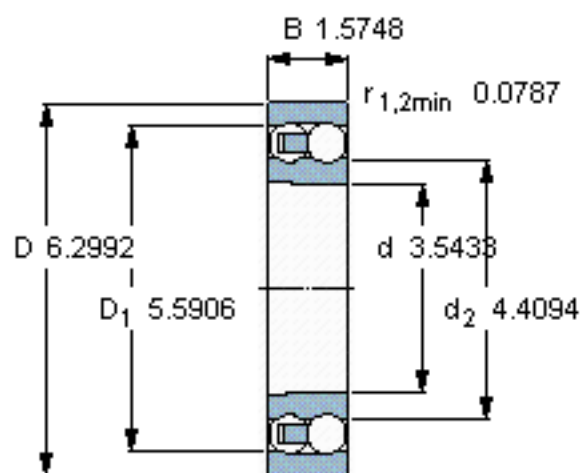

计算系数

- $e = 0,27$
- $Y_1 = 2,3$
- $Y_2 = 3,6$
- $Y_0 = 2,5$

圆锥孔，圆锥
1: 12