
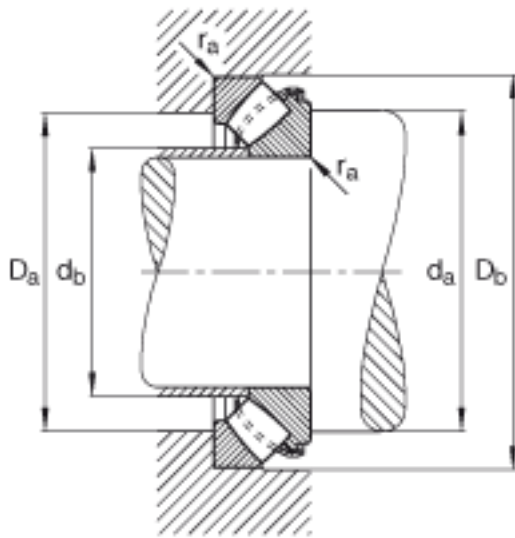


FAG 29352-E1参数

尺寸	A	148	mm	-
	D_1	324	mm	-
	$D_{a \max}$	372	mm	-
	$D_{b \min}$	430	mm	-
	d_1	387.7	mm	-
	$d_{a \min}$	340	mm	-
	$d_{b \max}$	275	mm	-
	$d_{b1 \max}$	286	mm	-
	$r_{a \max}$	4	mm	-
	r_{\min}	5	mm	-
	T_1	46	mm	-
	T_3	61	mm	-
	T_5	85.2	mm	-
重量	m	45800	g	质量
基本额定载荷	C_a	2500000	N	基本额定动载荷, 轴向
	C_{0a}	8100000	N	基本额定静载荷, 轴向
极限转速	n_G	1530	r/min	极限转速
参考转速	n_B	800	r/min	参考速度
疲劳极限载荷	C_{ua}	900000	N	疲劳极限载荷, 轴向
尺寸	d	260	mm	-
	D	420	mm	-
	T	95	mm	-

FAG 29352-E1图片

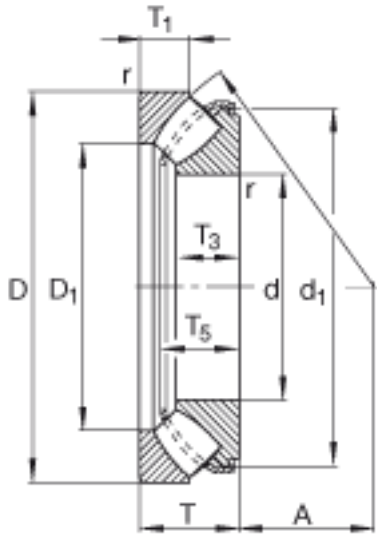

参考资料:<http://www.sozhou.com/p/7d381886.html>

