
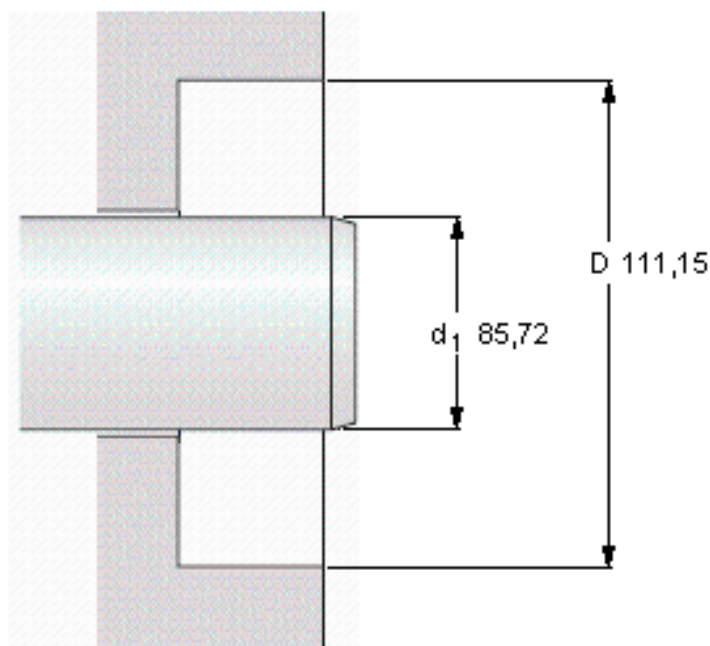


SKF 33699参数

主要尺寸	d_1	85.72	mm	—
	d_1	111.15	mm	—
	b	9.53	mm	—
设计	设计	CRWA1	—	—
密封唇材料	密封唇材料	V	—	—
Pressuredifferential [MPa/psi]	Pressure differential [MPa / psi]	0.07	—	—
型号	型号	33699	—	—
美国图纸编号	美国图纸编号	33699	—	—

SKF 33699图片

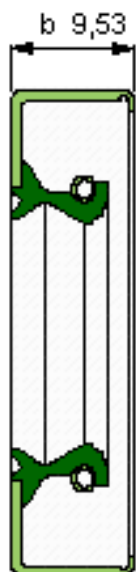

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428



Rotational speed [r/min]

4010
at circumferential speed [m/s / ft/s]
18 / 59.04

Pressure differential [MPa / psi]

0.07 / 10.15

See also "Permissible speeds" and "Chemical and thermal resistance"

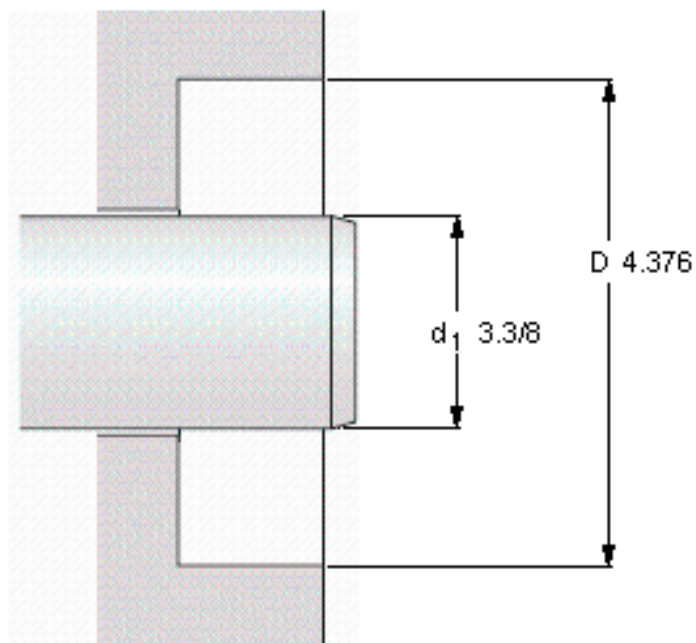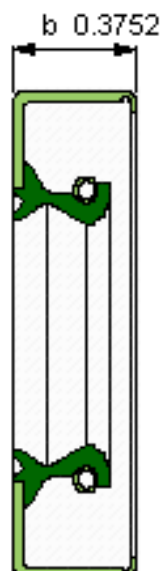

Permissible operating temperature [°C / °F]

最小	最大
-40 / -40	200 / 392
	short periods
	220 / 428

Rotational speed [r/min]

4010
at circumferential speed [m/s / ft/s]
18 / 59,04

Pressure differential [MPa / psi]

0,07 / 10,15

See also "Permissible speeds" and "Chemical and thermal resistance"

参考资料:<http://www.sozhou.com/p/7f566073.html>