


SKF BSD 4575 C参数

主要尺寸	d	45	mm	-
	D	75	mm	-
	H	15	mm	-
基本额定载荷	C	32500	N	动载荷
	C_0	98000	N	静载荷
疲劳载荷极限	P_u	3650	N	-
可达转速	Grease lubrication	7500	r/min	-
	Oil-air lubrication	9000	r/min	-
重量	重量	260	g	-
型号	型号	BSD 4575 C	-	-

SKF BSD 4575 C图片

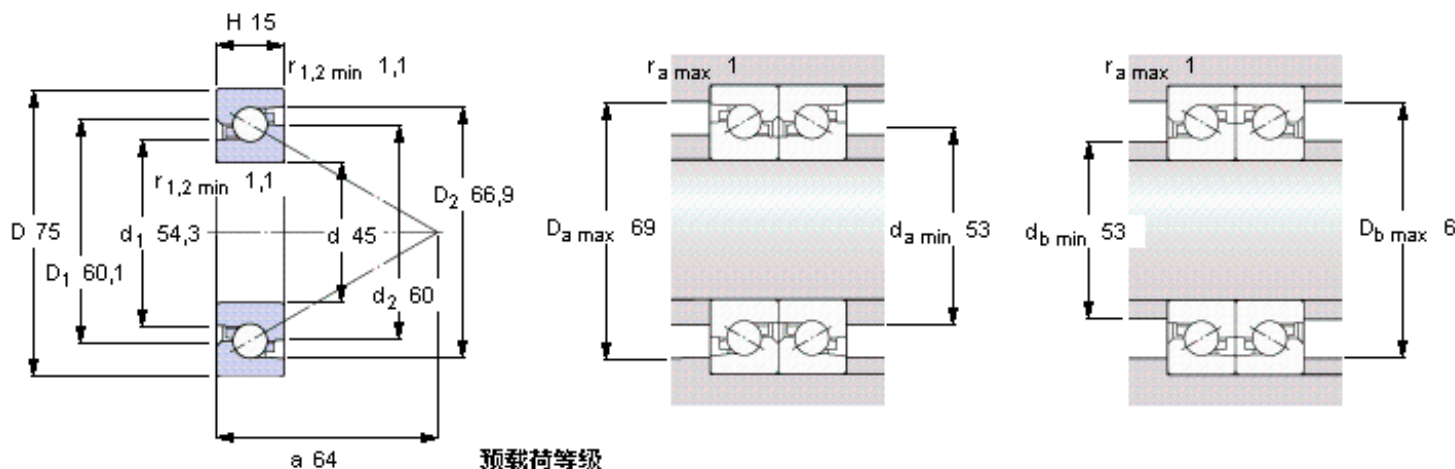

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face




预载荷等级

	A	B
Preload ¹⁾ [N]	2900	5800
Frictional moment ¹⁾ [Nm] (guideline value)	0,25	0,41
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1180	1500

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 G_{ref} 2,7

参考资料: <http://www.sozhou.com/p/80e672d2.html>

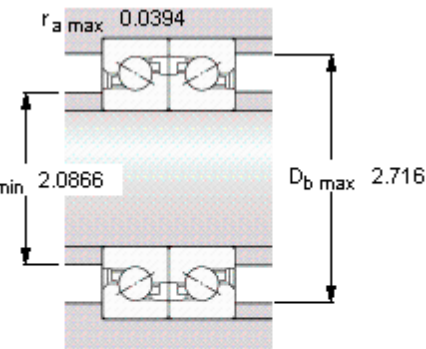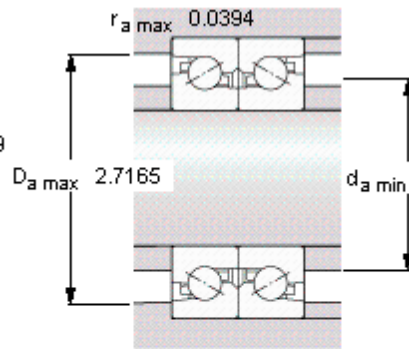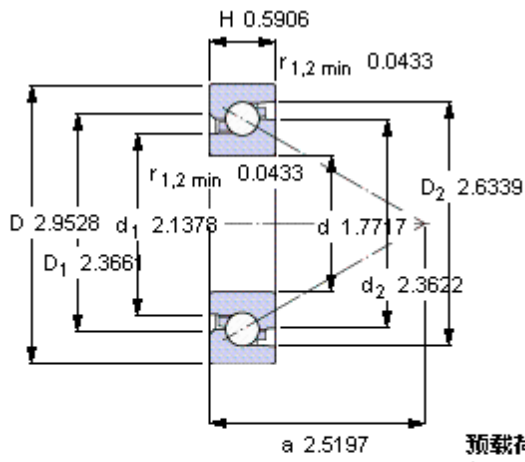

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

	A	B
Preload ¹⁾ [N]	2900	5800
Frictional moment ¹⁾ [Nm]	0,25	0,41
Static axial stiffness ¹⁾ [N/μm]	1180	1500

Max. axial load carrying capacity

(guideline value)

40,2

Reference grease quantity [cm³]

G_{ref} 2,7

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face