
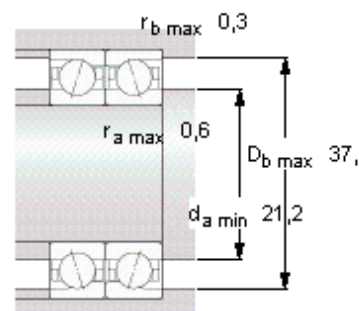
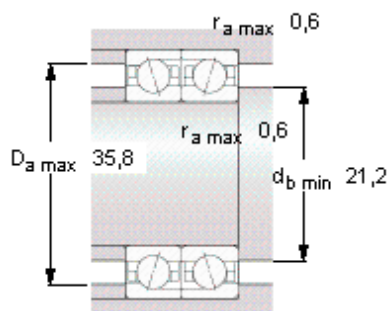



SKF 7203 CD/HCP4A参数

主要尺寸	d	17	mm	—
	D	40	mm	—
	B	12	mm	—
基本额定载荷	C	9230	N	动载荷
	C_0	4150	N	静载荷
疲劳载荷极限	P_u	176	N	—
可达转速	Grease	53000	r/min	—
	Oil-air	75000	r/min	—
重量	重量	54	g	—
型号	型号	7203 CD/HCP4A	—	—

SKF 7203 CD/HCP4A图片

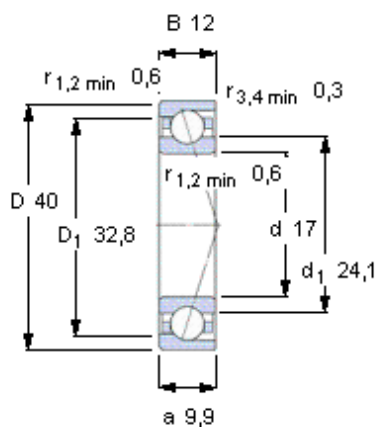

Ball diameter 7,144

Number of balls 10

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
35	70	140	280

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
23	31	42	59

Reference grease quantity [cm³]

G_{ref} 1

计算系数

for equivalent bearing load

f_0 8,5

for preload in mounted bearing sets

f 1,03

f_1 1





f_{2A} 1

f_{2B} 1,01

f_{2C} 1,03

f_{2D} 1,06

f_{HC} 1,01

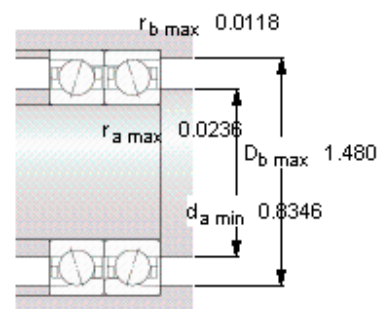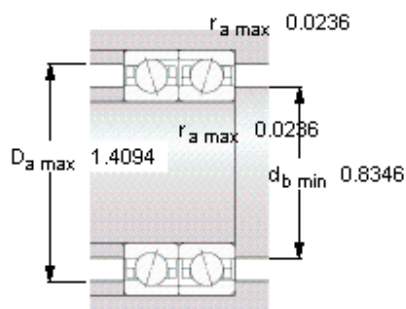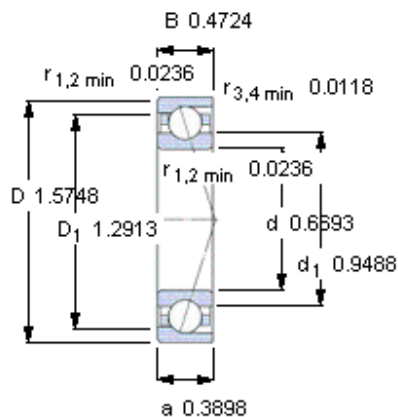

Ball diameter 7,144
Number of balls 10

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
35	70	140	280

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
23	31	42	59

Reference grease quantity [cm³]

G_{ref} 1

计算系数

for equivalent bearing load

f_0 8,5

for preload in mounted bearing sets

f 1,03

f_1 1

f_{2A} 1

f_{2B} 1,01

f_{2C} 1,03

f_{2D} 1,06

f_{HC} 1,01