



NSK FCRE-16参数

尺寸	R	0.3	mm	(最小)
基本额定载荷	CR	5800	N	动载荷
极限载荷	PMAX	2360	N	极限载荷
滚轮极限载荷	LTL	3350	N	滚轮极限载荷
重量	MASS	20	g	重量
六角形孔的尺寸	X	0.0	mm	双边距离
偏心轴衬尺寸	B4	8.0	mm	—
	SD1	9	mm	—
	E	0.5	mm	—
挡肩尺寸	F	11.0	mm	(最小)
拧紧力矩	TT	226	n. cm	(最大)
型号	型号	FCRE-16		—
外形尺寸	D	16	mm	外径
	C	11	mm	宽度
	SD	6	mm	外径
尺寸	G	M6x1	mm	螺栓
	G1	8	mm	—
	B1	28	mm	—
	B2	16.0	mm	—
	B3		mm	—
	M2		mm	—
	M1	4	mm	—

NSK FCRE-16图片

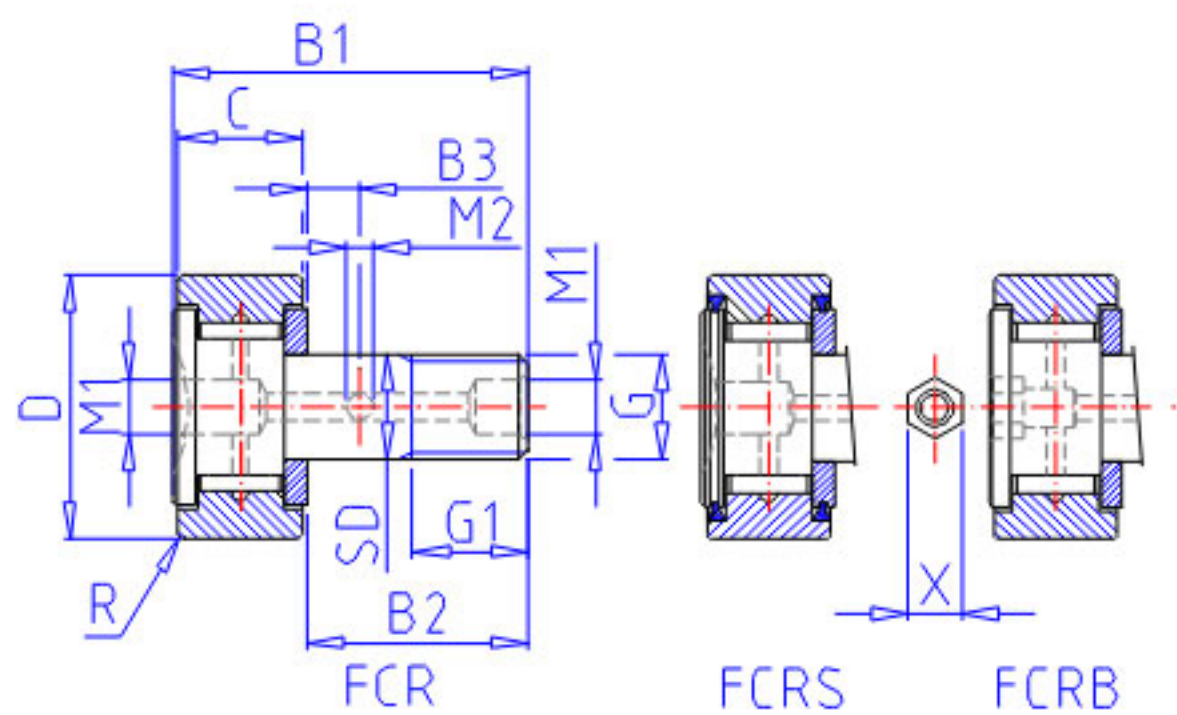

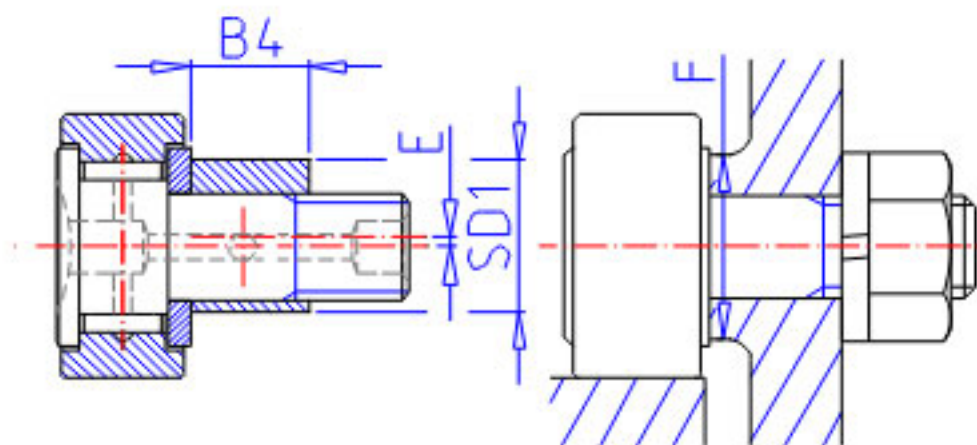

FCRE

参考资料:<http://www.sozhou.com/p/856bfa7f.html>

