


SKF 71828 CD/P4参数

主要尺寸	d	140	mm	—
	D	175	mm	—
	B	18	mm	—
基本额定载荷	C	44900	N	动载荷
	C_0	62000	N	静载荷
疲劳载荷极限	P_u	2120	N	—
可达转速	Grease	6300	r/min	—
	Oil-air	10000	r/min	—
重量	重量	800	g	—
型号	型号	71828 CD/P4	—	—

SKF 71828 CD/P4图片

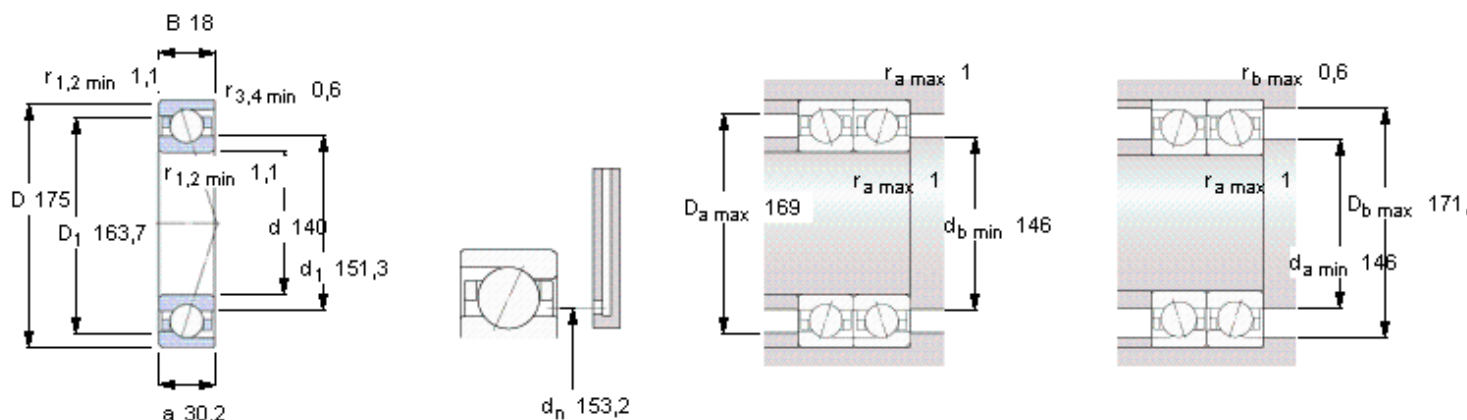

Ball diameter 10,319

Number of balls 35

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
180	535	1070	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
130	226	336	-

Reference grease quantity [cm³]

G_{ref} 9,9

计算系数

for equivalent bearing load

f_0 17,3

for preload in mounted bearing sets

f 1,43

f_1 1

f_{2A} 1





f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1

参考资料: <http://www.sozhou.com/p/90f6d906.html>

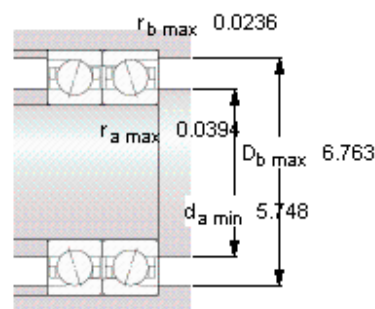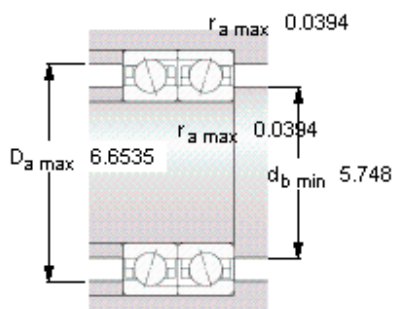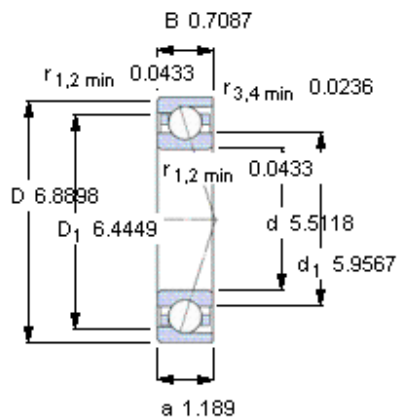

Ball diameter 10,319
Number of balls 35

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
180	535	1070	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
130	226	336	-

Reference grease quantity [cm³]

G_{ref} 9,9

计算系数

for equivalent bearing load

f_0 17,3

for preload in mounted bearing sets

f 1,43

f_1 1

f_{2A} 1

f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1