

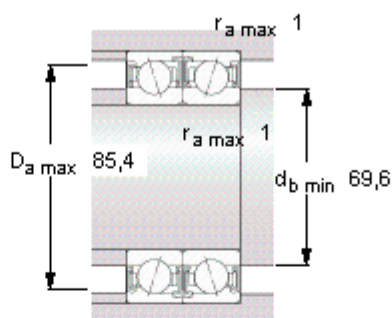


SKF S71913 CD/P4A参数

主要尺寸	d	65	mm	—
	D	90	mm	—
	B	13	mm	—
基本额定载荷	C	20800	N	动载荷
	C_0	17000	N	静载荷
疲劳载荷极限	P_u	710	N	—
可达转速	Grease	14000	r/min	—
	Oil-air	—	r/min	—
重量	重量	210	g	—
型号	型号	S71913 CD/P4A	—	—

SKF S71913 CD/P4A图片

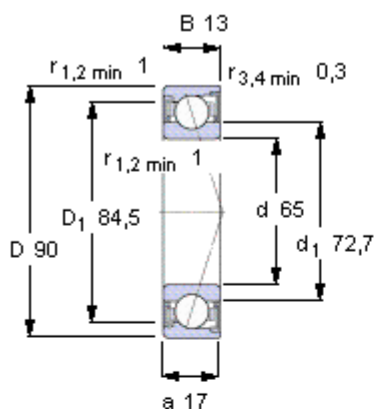

Ball diameter 7,938

Number of balls 26

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
80	160	320	640

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
56	75	104	148

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 10,7

for preload in mounted bearing sets

f 1,2

f_1 1




f_{2A} 1

f_{2B} 1,04

f_{2C} 1,09

f_{2D} 1,15

f_{HC} 1

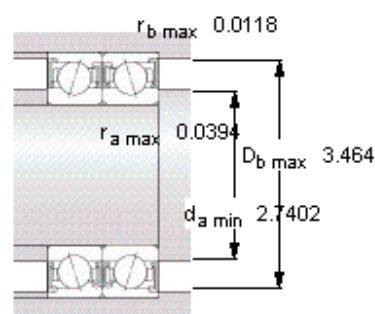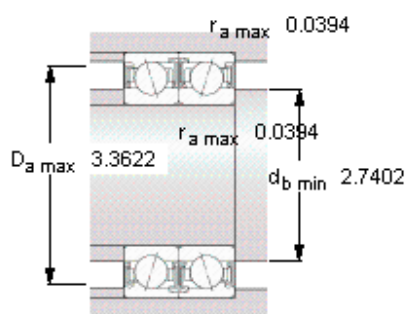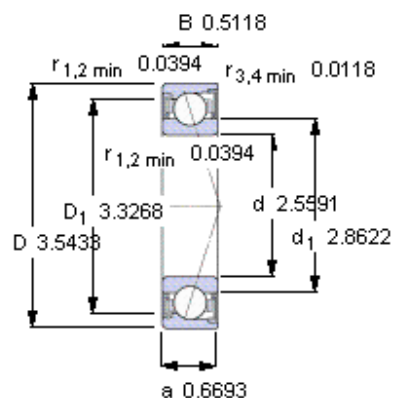

Ball diameter 7,938

Number of balls 26

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
80	160	320	640

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
56	75	104	148

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 10,7

for preload in mounted bearing sets

f 1,2

f_1 1

f_{2A} 1

f_{2B} 1,04

f_{2C} 1,09

f_{2D} 1,15

f_{HC} 1