
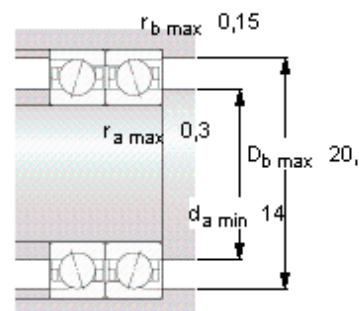
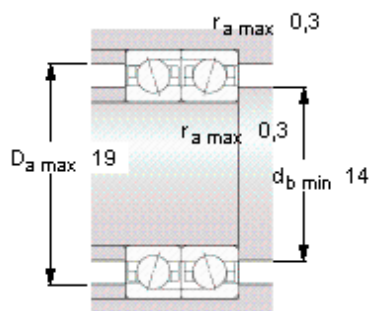



SKF 71801 CD/P4参数

主要尺寸	d	12	mm	—
	D	21	mm	—
	B	5	mm	—
基本额定载荷	C	2080	N	动载荷
	C_0	1180	N	静载荷
疲劳载荷极限	P_u	50	N	—
可达转速	Grease	70000	r/min	—
	Oil-air	110000	r/min	—
重量	重量	6	g	—
型号	型号	71801 CD/P4	—	—

SKF 71801 CD/P4图片

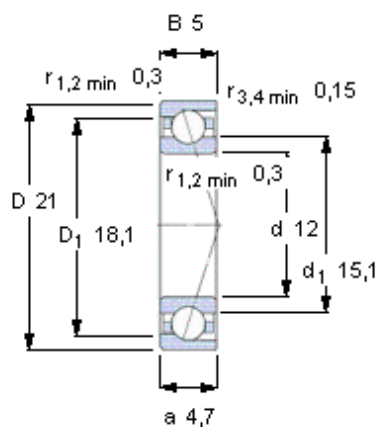

Ball diameter 2,381

Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
8	25	50	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
15	25	37	-

Reference grease quantity [cm³]

G_{ref} 0,07

计算系数

for equivalent bearing load

f_0 15,4

for preload in mounted bearing sets

f 1,06

f_1 1





f_{2A} 1

f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1

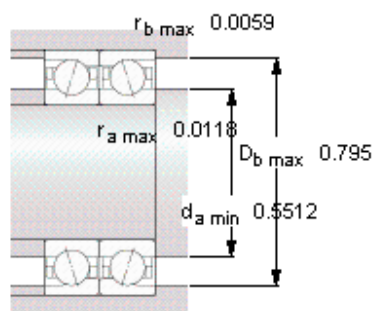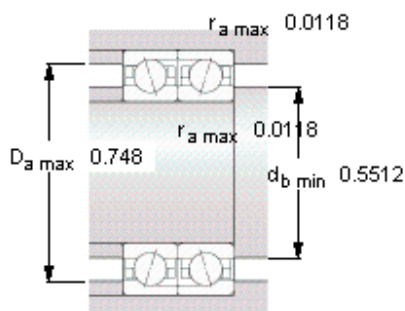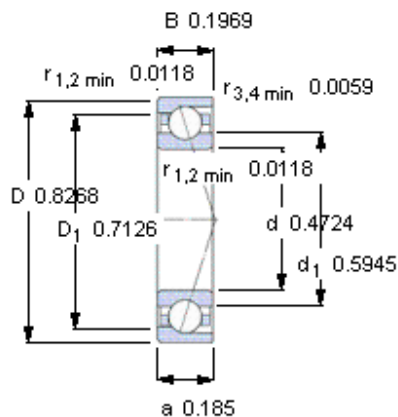

Ball diameter 2,381
Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
8	25	50	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
15	25	37	-

Reference grease quantity [cm³]

G_{ref} 0,07

计算系数

for equivalent bearing load

f_0 15,4

for preload in mounted bearing sets

f 1,06

f_1 1

f_{2A} 1

f_{2B} 1,09

f_{2C} 1,16

f_{2D} -

f_{HC} 1