

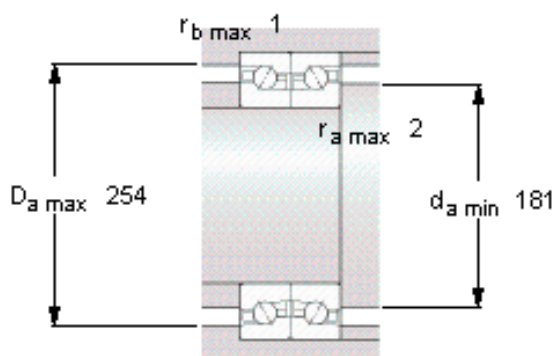


SKF BTM 170 BM/HCP4CDBB参数

主要尺寸	d	170	mm	—
	D	260	mm	—
	H	81	mm	—
基本额定载荷	C	140000	N	动载荷
	C_0	360000	N	静载荷
疲劳载荷极限	P_u	10400	N	—
可达转速	Grease	2900	r/min	—
	Oil-air	3500	r/min	—
重量	重量	15000	g	—
型号	型号	BTM 170 BM/HCP4CDBB	—	—

SKF BTM 170 BM/HCP4CDBB图片

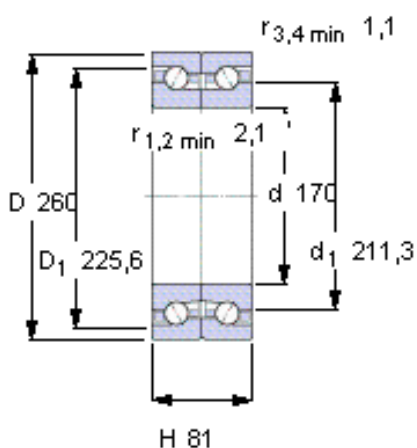

未安装时的预载荷 [N]

5400

Reference grease quantity [cm³]


G_{ref} 126

Static axial stiffness [N/μm]

(guideline value)

1553

参考资料: <http://www.sozhou.com/p/a9ecc5db.html>

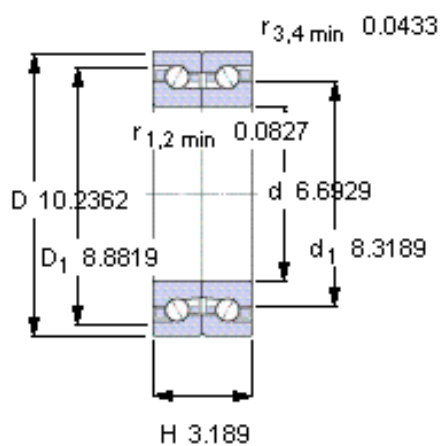


未安装时的预载荷 [N]

5400

Reference grease quantity [cm³]

G_{ref} 126

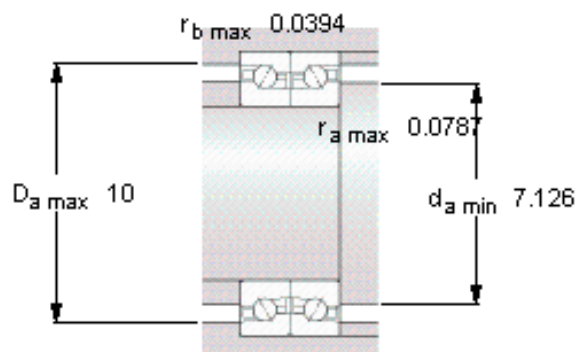

Static axial stiffness [N/μm]

(guideline value)

1553

