


### FAG NUP212-E-TVP2参数

尺寸	d	60	mm	-
	D	110	mm	-
	B	22	mm	-
	B <sub>3</sub>	4	mm	-
	D <sub>1</sub>	96.1	mm	-
	D <sub>a max</sub>	101	mm	-
	d <sub>1</sub>	77.6	mm	-
	d <sub>a max</sub>	71	mm	-
	d <sub>a min</sub>	69	mm	-
	d <sub>c min</sub>	80	mm	-
	F	72	mm	-
	r <sub>1 min</sub>	1.5	mm	-
	r <sub>a max</sub>	1.5	mm	-
	r <sub>al max</sub>	1.5	mm	-
	r <sub>min</sub>	1.5	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	865	g	质量
基本额定载荷	C <sub>r</sub>	112000	N	基本额定动载荷，径向
	C <sub>0r</sub>	103000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	7700	r/min	极限转速
参考转速	n <sub>B</sub>	5400	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	17800	N	疲劳极限载荷，径向

### FAG NUP212-E-TVP2图片

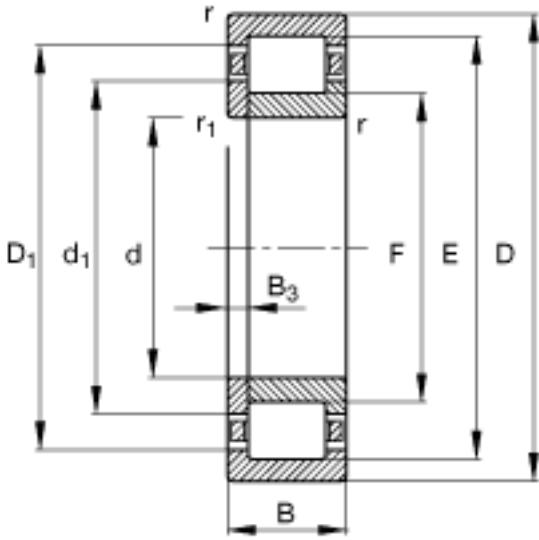

参考资料:<http://www.sozhou.com/p/b51438ff.html>

