
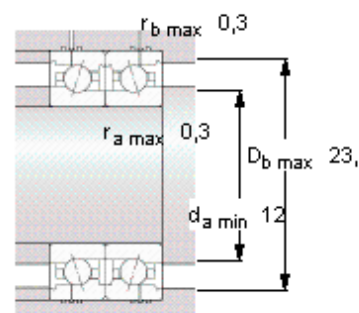
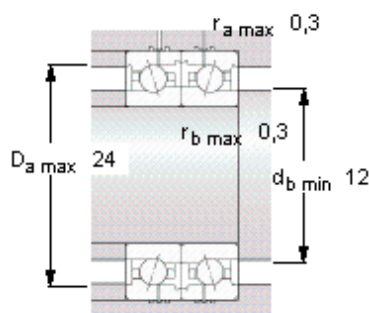



SKF 7000 CE/HCP4AH参数

主要尺寸	d	10	mm	—
	D	26	mm	—
	B	8	mm	—
基本额定载荷	C	3020	N	动载荷
	C_0	1180	N	静载荷
疲劳载荷极限	P_u	50	N	—
可达转速	Grease	109000	r/min	—
	Oil-air	165000	r/min	—
重量	重量	17	g	—
型号	型号	7000 CE/HCP4AH	—	—

SKF 7000 CE/HCP4AH图片

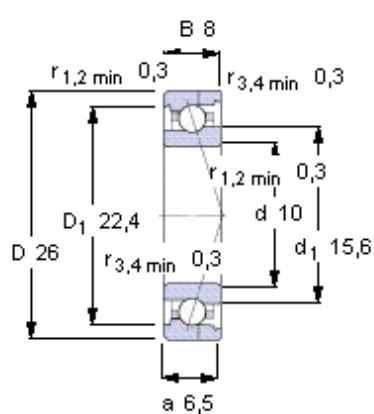

Ball diameter 3,969

Number of balls 11

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
15	48	95	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
13	21	29	-

Reference grease quantity [cm³]

G_{ref} 0,28

计算系数

for equivalent bearing load

f_0 7,1

for preload in mounted bearing sets

f 1,03

f_1 1

f_{2A} 1





f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1,01

参考资料: <http://www.sozhou.com/p/b908b2e6.html>

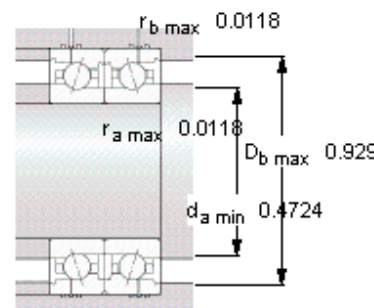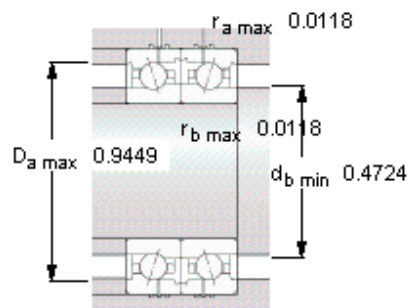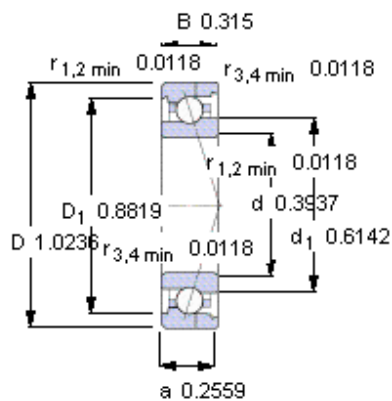

Ball diameter 3,969

Number of balls 11

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
15	48	95	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
13	21	29	-

Reference grease quantity [cm³]

G_{ref} 0,28

计算系数

for equivalent bearing load

f₀ 7,1

for preload in mounted bearing sets

f 1,03

f₁ 1

f_{2A} 1

f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1,01