


### FAG 29240-E1-MB参数

尺寸	d	200	mm	-
	D	280	mm	-
	T	48	mm	-
	A	108	mm	-
	D <sub>1</sub>	232.5	mm	-
	D <sub>a max</sub>	258	mm	-
	D <sub>b min</sub>	284	mm	-
	d <sub>1</sub>	265	mm	-
	d <sub>a min</sub>	240	mm	-
	d <sub>b max</sub>	209	mm	-
	r <sub>a max</sub>	2	mm	-
	r <sub>min</sub>	2	mm	-
	T <sub>1</sub>	24	mm	-
	T <sub>2</sub>	17	mm	-
	T <sub>3</sub>	30	mm	-
	T <sub>4</sub>	45	mm	-
	重量	m	9000	g
基本额定载荷	C <sub>a</sub>	650000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	2700000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	2320	r/min	极限转速
参考转速	n <sub>B</sub>	1280	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	315000	N	疲劳极限载荷, 轴向

### FAG 29240-E1-MB图片

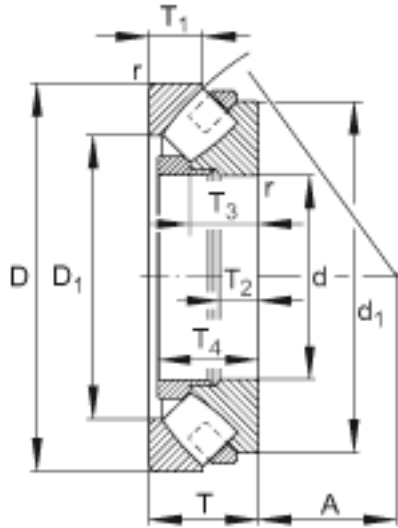

参考资料:<http://www.sozhou.com/p/b938d463.html>