
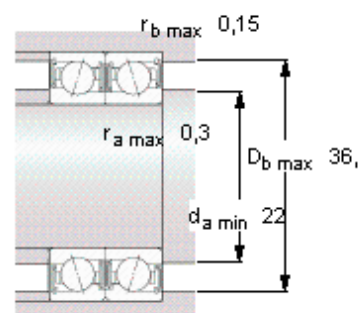
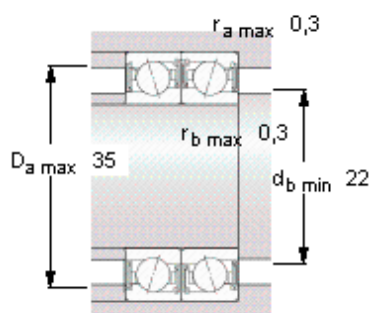


SKF S71904 CE/HCP4A参数

主要尺寸	d	20	mm	-
	D	37	mm	-
	B	9	mm	-
基本额定载荷	C	4880	N	动载荷
	C_0	2400	N	静载荷
疲劳载荷极限	P_u	102	N	-
可达转速	Grease	68000	r/min	-
	Oil-air	-	r/min	-
重量	重量	31	g	-
型号	型号	S71904 CE/HCP4A	-	-

SKF S71904 CE/HCP4A图片

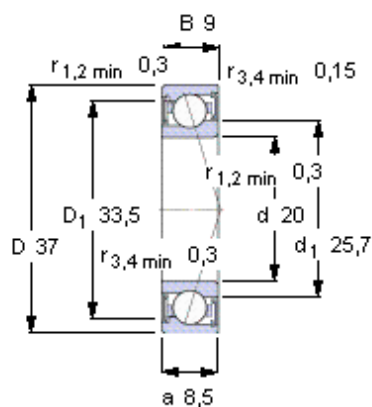

Ball diameter 4,762
Number of balls 14

未安装时的预载荷 [N]
背对背配置，面对面配置
预载荷等级

A	B	C	D
26	79	157	-

Static axial stiffness [N/μm]
(guideline value)

预载荷等级

A	B	C	D
20	31	43	-




Reference grease quantity [cm³]
 G_{ref} -

计算系数
for equivalent bearing load
 f_0 7,8

for preload in mounted bearing sets

f	1,04
f_1	1
f_{2A}	1
f_{2B}	1,05
f_{2C}	1,09
f_{2D}	-
f_{HC}	1,01

参考资料: <http://www.sozhou.com/p/bd9964ae.html>

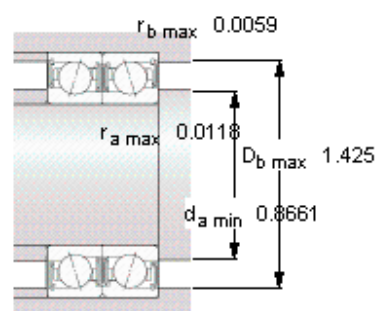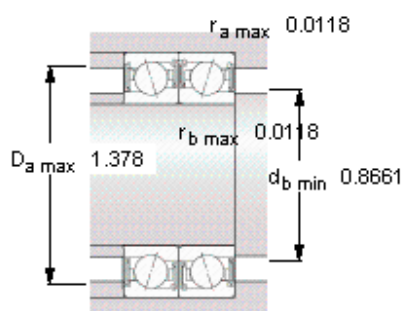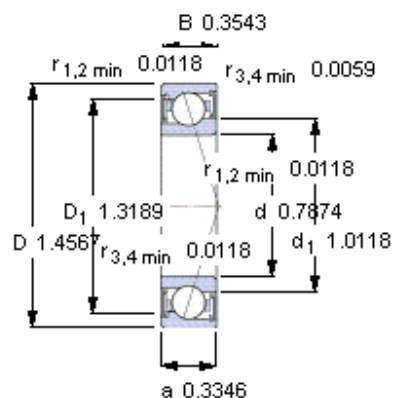

Ball diameter 4,762

Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
26	79	157	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
20	31	43	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f₀ 7,8

for preload in mounted bearing sets

f 1,04

f₁ 1

f_{2A} 1

f_{2B} 1,05

f_{2C} 1,09

f_{2D} -

f_{HC} 1,01