



NSK FCRSE-22参数

尺寸	G	M10x1. 25	mm	螺栓
	G1	12	mm	—
	B1	36	mm	—
	B2	23. 0	mm	—
	B3		mm	—
	M2		mm	—
	M1	4	mm	—
	R	0. 3	mm	(最小)
基本额定载荷	CR	8550	N	动载荷
极限载荷	PMAX	6550	N	极限载荷
滚轮极限载荷	LTL	5300	N	滚轮极限载荷
重量	MASS	47	g	重量
六角形孔的尺寸	X	0. 0	mm	双边距离
偏心轴衬尺寸	B4	11. 0	mm	—
	SD1	13	mm	—
	E	0. 5	mm	—
挡肩尺寸	F	15. 0	mm	(最小)
拧紧力矩	TT	1060	n. cm	(最大)
型号	型号	FCRSE-22		—
外形尺寸	D	22	mm	外径
	C	12	mm	宽度
	SD	10	mm	外径

NSK FCRSE-22图片

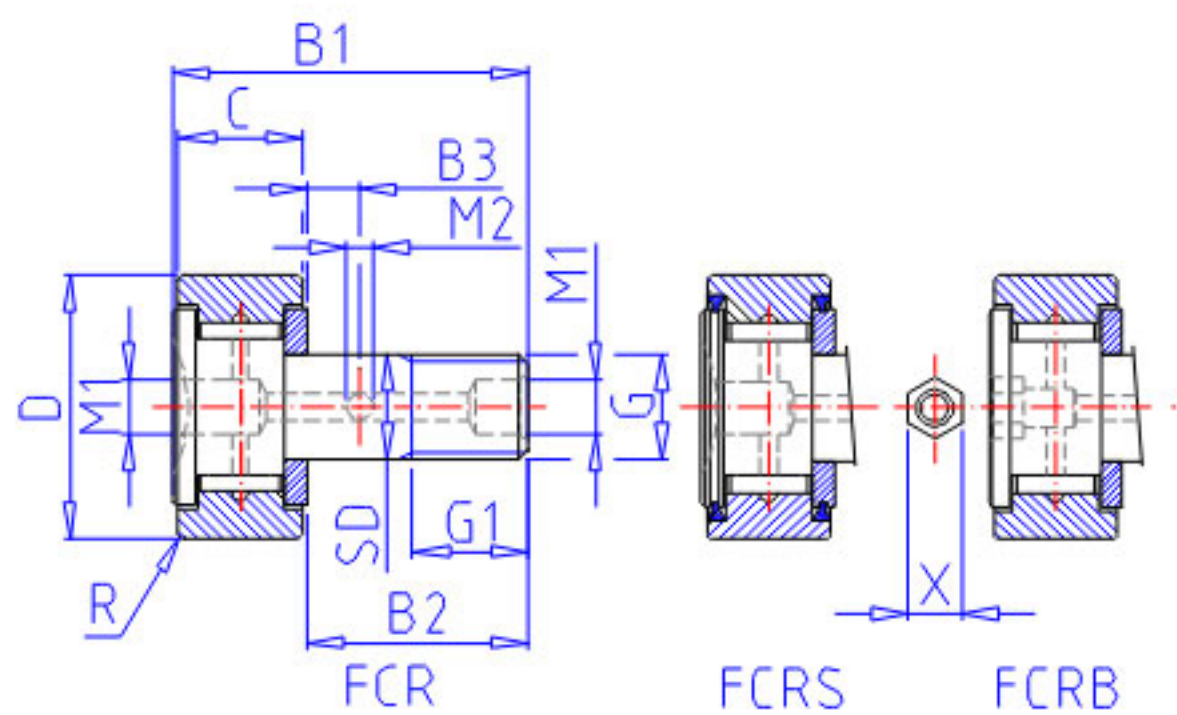

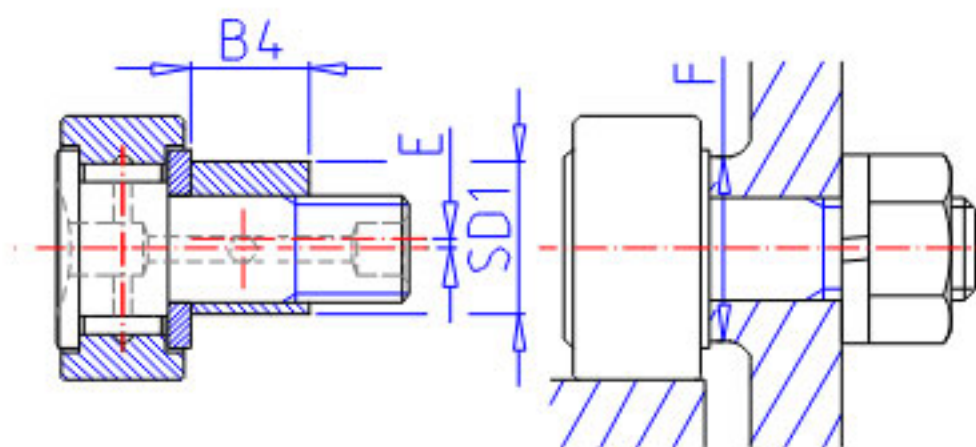

FCRE

参考资料:<http://www.sozhou.com/p/c02023e7.html>

