
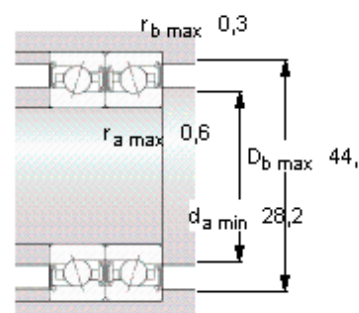
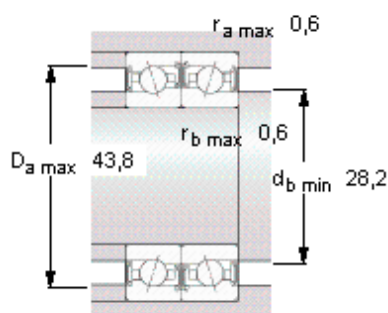


SKF S7005 CE/P4A参数

主要尺寸	d	25	mm	—
	D	47	mm	—
	B	12	mm	—
基本额定载荷	C	8320	N	动载荷
	C_0	4150	N	静载荷
疲劳载荷极限	P_u	173	N	—
可达转速	Grease	46000	r/min	—
	Oil-air	—	r/min	—
重量	重量	77	g	—
型号	型号	S7005 CE/P4A	—	—

SKF S7005 CE/P4A图片

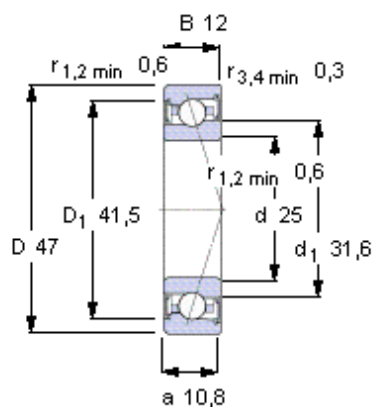

Ball diameter 6,35

Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
45	130	260	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
24	37	50	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f_0 7,5

for preload in mounted bearing sets

f 1,05

f_1 1

f_{2A} 1




f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1

参考资料: <http://www.sozhou.com/p/c09a92cf.html>

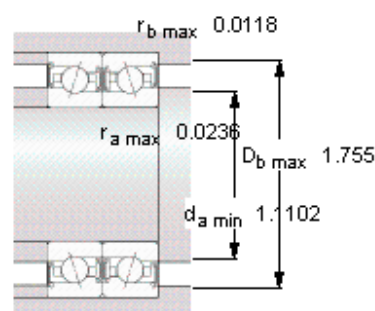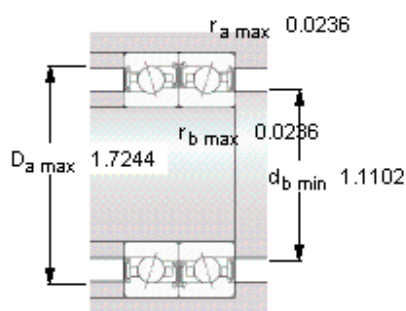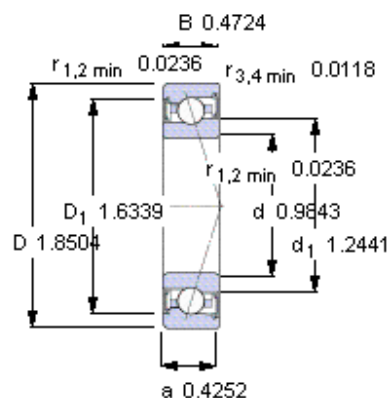

Ball diameter 6,35
Number of balls 14

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
45	130	260	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
24	37	50	-

Reference grease quantity [cm³]

G_{ref} -

计算系数

for equivalent bearing load

f₀ 7,5

for preload in mounted bearing sets

f 1,05

f₁ 1

f_{2A} 1

f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1