


SKF BSD 3062 C参数

主要尺寸	d	30	mm	-
	D	62	mm	-
	H	15	mm	-
基本额定载荷	C	28500	N	动载荷
	C_0	71000	N	静载荷
疲劳载荷极限	P_u	2650	N	-
可达转速	Grease lubrication	8000	r/min	-
	Oil-air lubrication	9500	r/min	-
重量	重量	220	g	-
型号	型号	BSD 3062 C	-	-

SKF BSD 3062 C图片

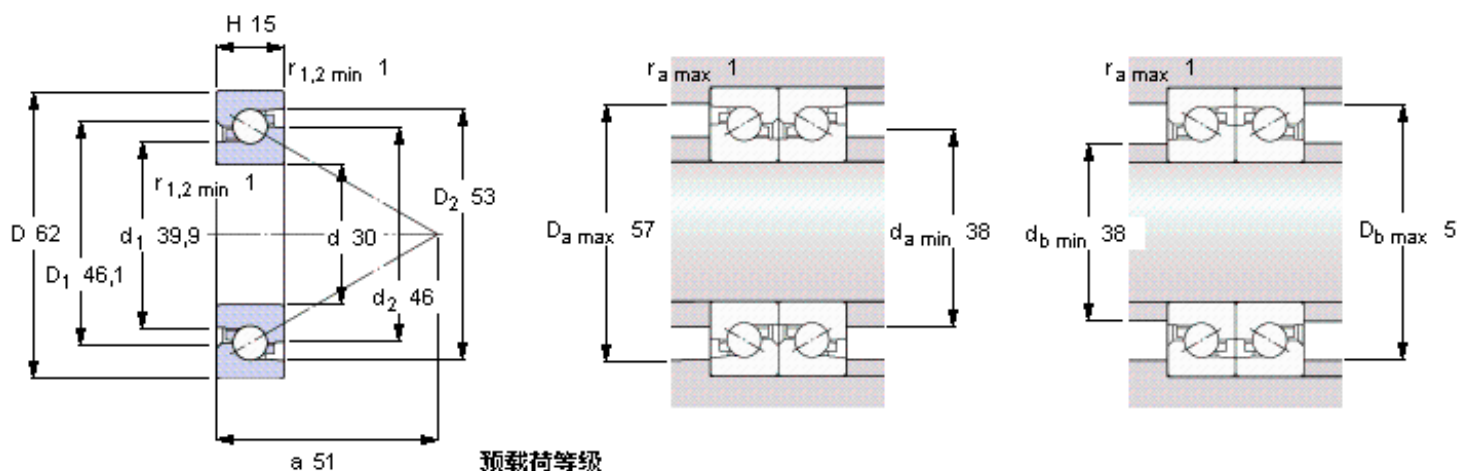

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/ μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级




	A	B
Preload ¹⁾ [N]	2150	4300
Frictional moment ¹⁾ [Nm]	0,125	0,215

Static axial stiffness ¹⁾ [N/ μm]	870	1110
--	-----	------

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 $G_{\text{ref}} = 2$

参考资料: <http://www.sozhou.com/p/c29d0edd.html>

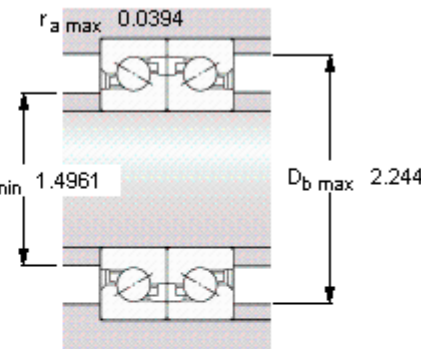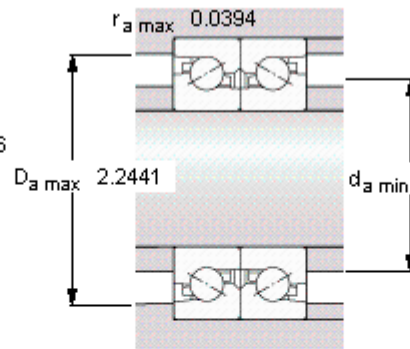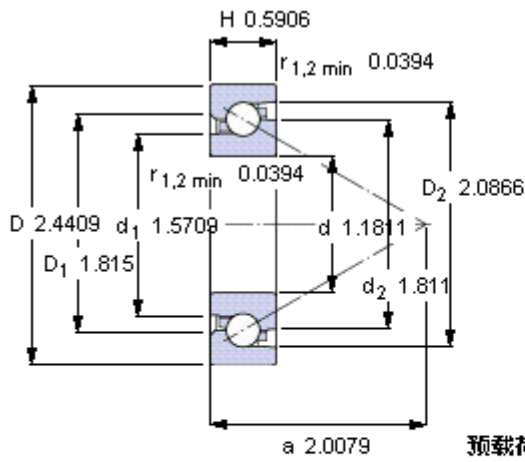

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

	A	B
Preload ¹⁾ [N]	2150	4300
Frictional moment ¹⁾ [Nm]	0,125	0,215
Static axial stiffness ¹⁾ [N/μm]	870	1110

Max. axial load carrying capacity

(guideline value)

22,6

Reference grease quantity [cm³]

G_{ref} 2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face