



NSK FCRB-22参数

偏心轴衬尺寸	E	0.0	mm	—
挡肩尺寸	F	15.0	mm	(最小)
拧紧力矩	TT	1060	n. cm	(最大)
型号	型号	FCRB-22		—
外形尺寸	D	22	mm	外径
	C	12	mm	宽度
尺寸	SD	10	mm	外径
	G	M10x1.25	mm	螺栓
	G1	12	mm	—
	B1	36	mm	—
	B2	23.0	mm	—
	B3		mm	—
	M2		mm	—
	M1	4	mm	—
	R	0.3	mm	(最小)
基本额定载荷	CR	8550	N	动载荷
极限载荷	PMAX	6550	N	极限载荷
滚轮极限载荷	LTL	5300	N	滚轮极限载荷
重量	MASS	47	g	重量
六角形孔的尺寸	X	5.0	mm	双边距离
偏心轴衬尺寸	B4	0.0	mm	—
	SD1		mm	—

NSK FCRB-22图片

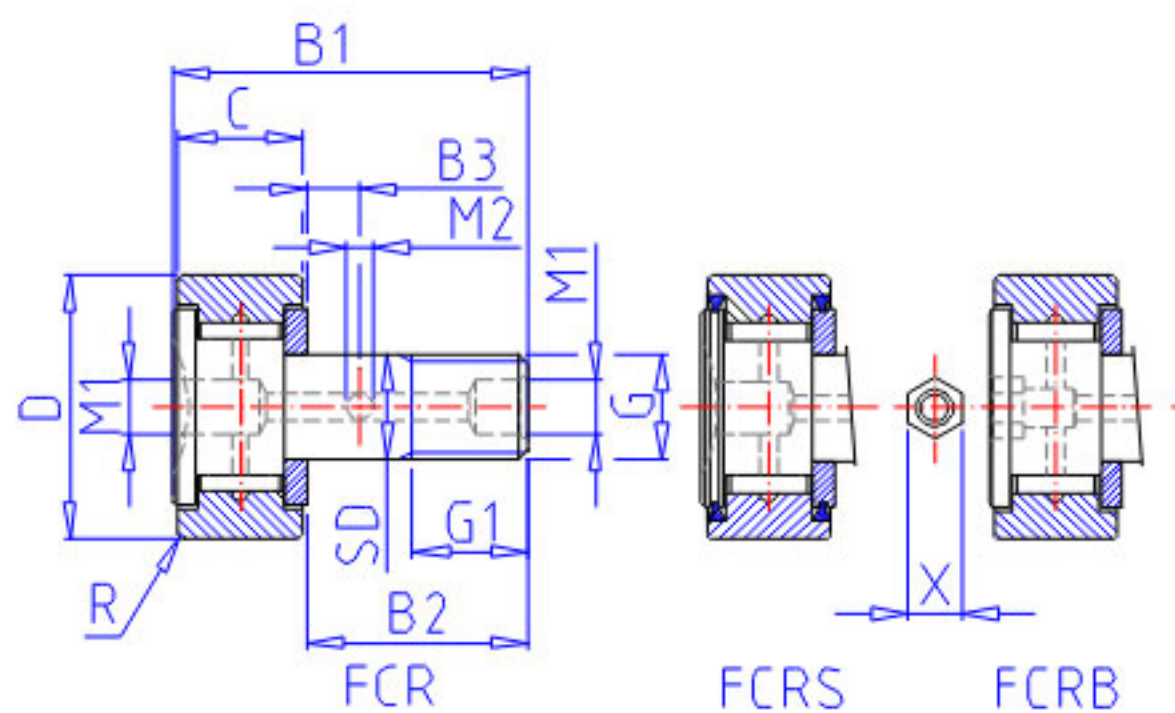

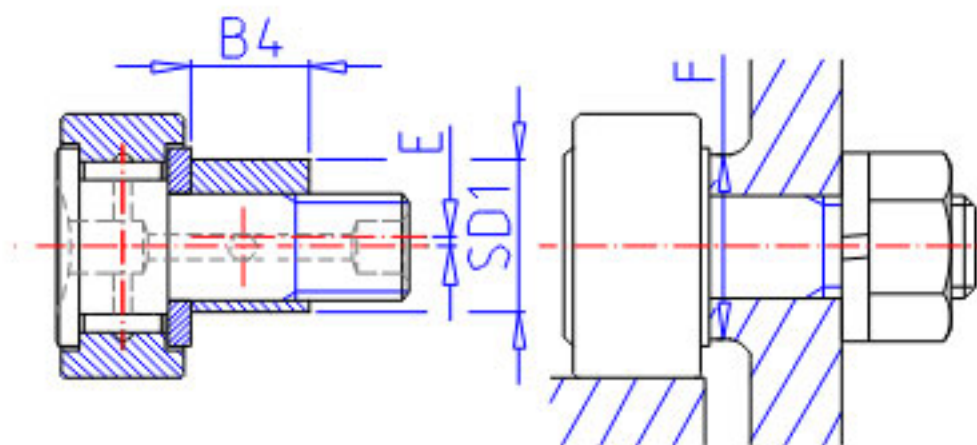

FCRE

参考资料:<http://www.sozhou.com/p/cc580702.html>

