


FAG NJ2212-E-TVP2 + HJ212-E参数

尺寸	$B_1$	6	mm	-
	$B_2$	10	mm	-
	$D_1$	96.1	mm	-
	$D_{a \max}$	101	mm	-
	$d_1$	77.6	mm	-
	$d_{a \max}$	71	mm	-
	$d_{a \min}$	69	mm	-
	$d_{c \min}$	80	mm	-
	E	100	mm	-
	F	72	mm	-
	$r_{1 \min}$	1.5	mm	-
	$r_{a \max}$	1.5	mm	-
	$r_{al \max}$	1.5	mm	-
	$r_{\min}$	1.5	mm	-
	s	1.6	mm	距离中心位置的轴向偏移
	说明		HJ212-E	型号, L 型圈
重量	m	1100	g	质量
	$m_1$	106	g	质量, L 型圈
基本额定载荷	$C_r$	152000	N	基本额定动载荷, 径向
	$C_{0r}$	153000	N	基本额定静载荷, 径向
极限转速	$n_G$	7700	r/min	极限转速
参考转速	$n_B$	4400	r/min	参考速度
疲劳极限载荷	$C_{ur}$	27500	N	疲劳极限载荷, 径向
尺寸	d	60	mm	-
	D	110	mm	-
	B	28	mm	-

FAG NJ2212-E-TVP2 + HJ212-E图片

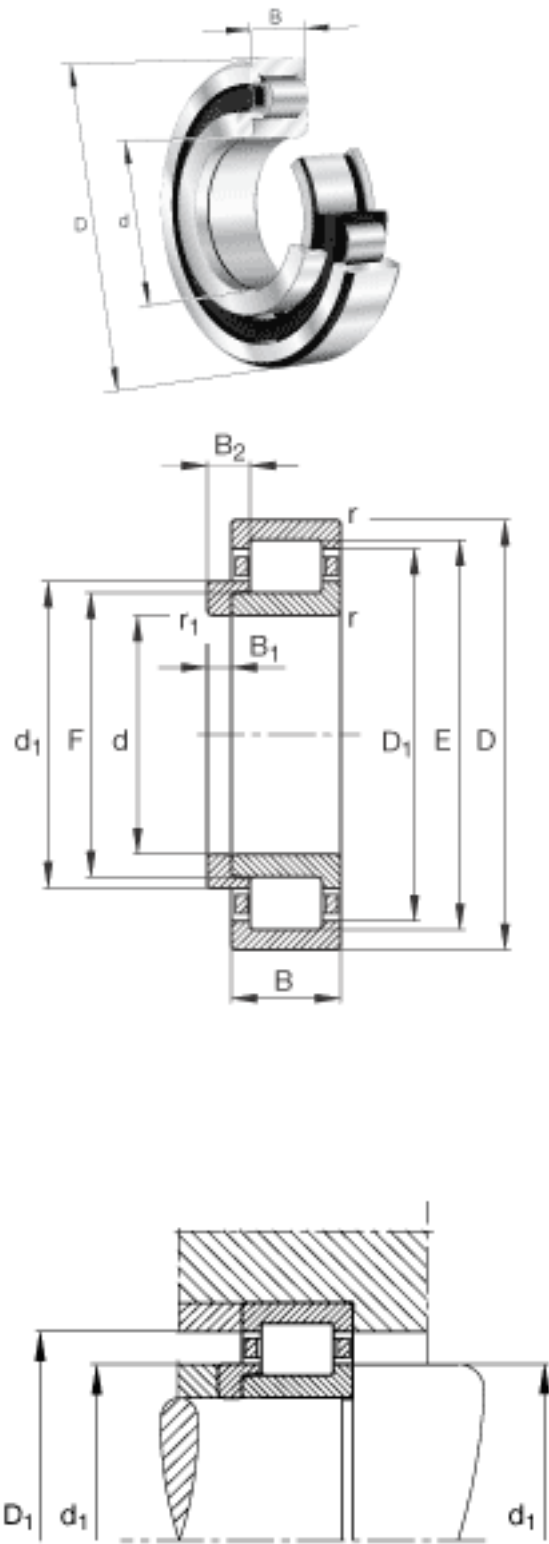

参考资料:<http://www.sozhou.com/p/cee7cfc5.html>

